



# TILA S ML EVO 2 Module

CE UK CA IK08 IP66

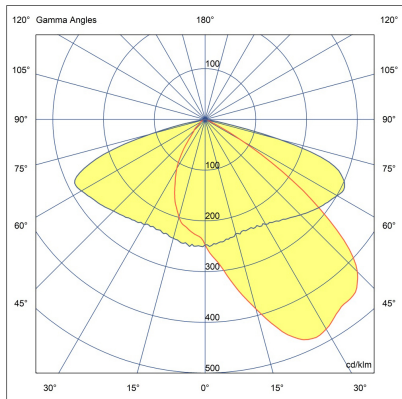

LL2030.682-EN-T2-700-827-ONOFF-EN-C1

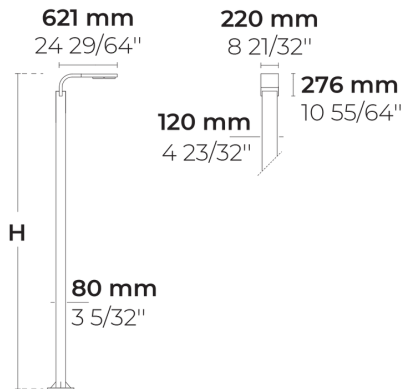

[T2]

Type II, Asymmetric,  
Side throw

## Variant

|                        |               |
|------------------------|---------------|
| Light distribution     | [T2] 130x85°  |
| Delivered lumens flux  | 5819 lm       |
| Rated input power      | 70 W          |
| Colour temperature     | 2700 K CRI 80 |
| Luminaire efficacy     | 83 lm/W       |
| Lamp                   | 8 LED         |
| MacAdam Ellipse        | 5 SDCM        |
| BUG rating             | B1-U0-G1      |
| Photobiological safety | Risk group 0  |
| Lifetime L90B50 (hour) | >60,000       |
| Lifetime L80B50 (hour) | >60,000       |

## Options

## Technical information

|                         |                                                                                                                       |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Mounting                | Direct pole or side bracket mountable. Spigot: Ø60 mm x 100 mm                                                        |
| Housing                 | Corrosion resistant, marine grade aluminum housing                                                                    |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating                                             |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                                                          |
| Gasket                  | Liquid gasket                                                                                                         |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector                                                      |
| Glass / Diffusor        | Bio-based, enriched with bisphenol A diffusor                                                                         |
| Impact protection       | IK08                                                                                                                  |
| Ingress protection      | IP66                                                                                                                  |
| Input voltage           | 220-240V 50/60Hz                                                                                                      |
| Insulation class        | Class I                                                                                                               |
| Weight                  | 20.32 kg (3 m), 23.46 kg (4 m)                                                                                        |
| LED module              | Multi-chip high power LEDs on metal-core PCB                                                                          |
| Driver                  | Internal LED driver                                                                                                   |
| Driver surge protection | 6/6 kV                                                                                                                |
| Power factor            | > 0.95                                                                                                                |
| Through wiring          | Single cable entry                                                                                                    |
| Operating temperature   | -40...50°C                                                                                                            |
| Pole detail             | Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional |

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

# Poles (Included)

## Product specific poles with flange plate



| Variant code              | Height | Diameter /<br>Dimensions | Spigot<br>diameter |
|---------------------------|--------|--------------------------|--------------------|
| PAFD.R02.T001.T00<br>2-H3 | 3m     | 120*80mm                 |                    |
| PAFD.R02.T001.T00<br>2-H4 | 4m     | 120*80mm                 |                    |

|                                               |  |      |  |          |  |
|-----------------------------------------------|--|------|--|----------|--|
| Project name                                  |  | Type |  | Quantity |  |
| Date                                          |  | Note |  |          |  |
| LL2030.682-EN-T2-700-827-ONOFF-EN-C1-__-__-__ |  |      |  |          |  |

| Light distribution                                            | Rated input power                     | Colour temperature            | Control                  | Product colours                                        |
|---------------------------------------------------------------|---------------------------------------|-------------------------------|--------------------------|--------------------------------------------------------|
| <b>[T2]</b><br>Type II, Asymmetric,<br>Side throw - 130x85°   | <b>[700]</b><br>70 W                  | <b>[827]</b><br>2700 K CRI 80 | <b>[ONOFF]</b><br>On/Off | <b>[HM1]</b><br>Black                                  |
|                                                               |                                       | <b>[830]</b><br>3000 K CRI 80 |                          | <b>[HM2]</b><br>Dark grey                              |
|                                                               |                                       | <b>[740]</b><br>4000 K CRI 70 |                          | <b>[HM3]</b><br>Anthracite grey                        |
|                                                               |                                       | <b>[840]</b><br>4000 K CRI 80 |                          | <b>[HM4]</b><br>Light grey                             |
|                                                               |                                       |                               |                          | <b>[HM5]</b><br>White                                  |
|                                                               |                                       |                               |                          | <b>[HM6]</b><br>Bronze                                 |
|                                                               |                                       |                               |                          | <b>[CC]</b><br>Custom colour (Please specify RAL code) |
| Height                                                        | Extras                                |                               |                          |                                                        |
| <b>[H3]</b><br>3m<br><br><b>[H4]</b><br>4m<br><br><b>[HC]</b> | Consult the factory                   |                               |                          |                                                        |
|                                                               | <b>[UNI]</b><br>120-277V 50/60Hz      |                               |                          |                                                        |
|                                                               | Luminaire body options                |                               |                          |                                                        |
|                                                               | <b>[DPC]</b><br>Double powder coating |                               |                          |                                                        |