



DOMINO ML EVO 2 Module Duo

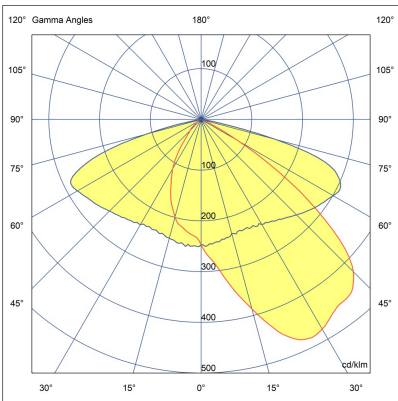

LP4091.682-EN-T2-700-840

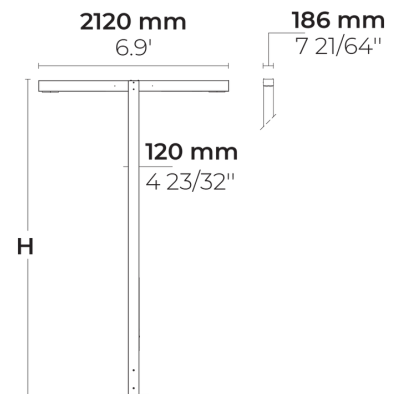

[T2]
Type II

Configuration

Light distribution	[T2] 130x85°
Delivered lumens flux	11783 lm
Rated input power	136 W
Color temperature	3000 K CRI 80
Luminaire efficacy	86 lm/W
Lamp	16 LED
Color Deviation	5 SDCM
BUG rating	B1-U0-G1
Photobiological safety	Risk group 0
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000

Options

Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Bio-based, enriched with bisphenol A diffusor
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	53.95 kg (4 m), 59.05 kg (5 m), 59.15 kg (6 m)
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C

Poles (Included)

Product specific poles with base plate



Configuration code	Height	Diameter / Dimensions	Spigot / End diameter
PAFD.R01.T003-H4	13.1'	7.1x4.7"	
PAFD.R01.T003-H5	16.4'	7.1x4.7"	
PAFD.R01.T003-H6	19.7'	7.1x4.7"	

Project name				Type		Quantity	
Date		Note					
LP4091.682-EN-T2-700-840-__-__-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
[T2] Type II - 130x85°	[700] 136 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black
		[827] 2700 K CRI 80	[DALI] DALI	[HM2] Dark gray
		[740] 4000 K CRI 70	[AUTO] AutoDIM	[HM3] Anthracite gray
		[840] 4000 K CRI 80	[STEP] StepDIM	[HM4] Light gray
				[HM5] White
				[HM6] Bronze
				[CC] Custom color (Please specify RAL code)
Height	Extras			
[H4] 13.1'	Light output			
[H5] 16.4'	[CLO] Constant light output			
[H6] 19.7'	Consult the factory			
[HC]	[UNI] 120-277V 50/60Hz			
	Luminaire body options			
	[DPC] Double powder coating			