



D-LIGHT L ML 4 Module



LL2024.674-US-T2-700-730



PHASED-
OUT

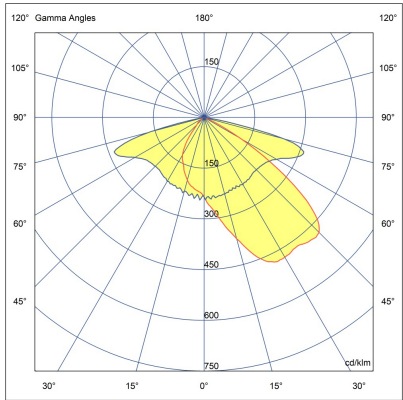

[T2]
Type II

Configuration




| | |
|------------------------|---------------|
| Light distribution | [T2] 130x85° |
| Delivered lumens flux | 14255 lm |
| Rated input power | 137 W |
| Color temperature | 3000 K CRI 70 |
| Luminaire efficacy | 104 lm/W |
| Lamp | 16 LED |
| Color Deviation | 5 SDCM |
| BUG rating | B3-U0-G2 |
| Photobiological safety | Risk group 0 |
| Lifetime L90 (hour) | >60,000 |
| Lifetime L80 (hour) | >60,000 |

Options

Technical information

| | |
|-----------------------------|---|
| Mounting | Direct pole or side bracket mountable. Tenon: Ø2 1/4" x 4" |
| Tilt angle | +15°/-15° |
| Housing | Corrosion resistant, die-cast, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | EPDM gasket (Shore A 20-25) |
| Lens / Reflector | High reflectance aluminium coating, multifaceted micro reflector |
| Glass / Diffusor | Bio-based, enriched with bisphenol A diffusor |
| Impact protection | IK08 |
| Ingress protection | IP66 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Wind catching area (EPA) | 2.9 ft² |
| Weight | 21.5 lbs |
| LED module | Multi-chip high power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 6/4 kV |
| Power factor | > 0.98 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 20" of outdoor use rated flexible power cord |
| Pole detail | Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional |

| | | | | | | | |
|--------------------------------------|--|------|--|------|--|----------|--|
| Project name | | | | Type | | Quantity | |
| Date | | Note | | | | | |
| LL2024.674-US-T2-700-730-__-__-__-__ | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|---------------------------------------|-----------------------|-------------------------------|--------------------------|---|
| [T2] Type II - 130x85° | [700] 137 W | [730] 3000 K CRI 70 | [ONOFF] On/Off | [HM3] Anthracite gray  |
| | | [830] 3000 K CRI 80 | [0-10V] 0-10V | [HM4] Light gray  |
| | | [740] 4000 K CRI 70 | | [CC]  Custom color (Please specify RAL code) |
| Extras | | | | |
| External surge protection | | | | |
| [SP10] 10 kV | | | | |
| Connectivity | | | | |
| [NM7] 7 Pin NEMA socket | | | | |
| Luminaire body options | | | | |
| [DPC] Double powder coating | | | | |