

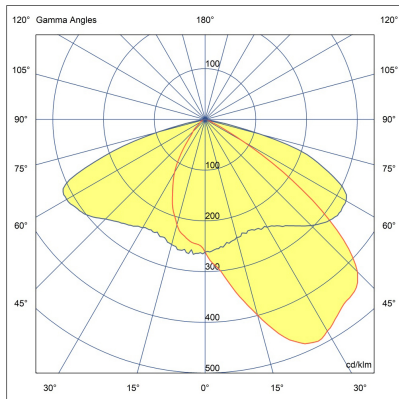


C-LIGHT ML 2 Module

CE UK CA IK08 IP66



LC2029.672-EN-T2-700-840-EN-C1

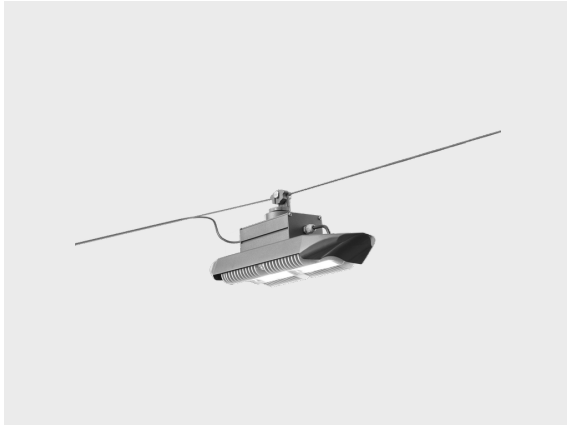

[T2]

Type II, Asymmetric,
Side throw

Variant

Light distribution	[T2] 130x85°
Delivered lumens flux	7357 lm
Rated input power	68 W
Colour temperature	4000 K CRI 80
Luminaire efficacy	105 lm/W
Lamp	8 LED
MacAdam Ellipse	5 SDCM
BUG rating	B2-U0-G1
Photobiological safety	Risk group 0
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000

Options

Technical information

Mounting	Catenary wire mounting
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Bio-based, enriched with bisphenol A diffusor
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	3.65 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	1 m of halogen-free cable
Notes	This product can be supplied with Insulation class (Class II) upon request. Please contact factory.

HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 17.05.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name		Type		Quantity	
Date		Note			
LC2029.672-EN-T2-700-840-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[T2] Type II, Asymmetric, Side throw - 130x85°	[700] 68 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[HM3] Anthracite grey 
[T5] Type V, Symmetric - 130x108°		[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70	[DALI] DALI [AUTO] AutoDIM [STEP] StepDIM	[HM4] Light grey  [CC]  Custom colour (Please specify RAL code)
Extras				
Consult the factory				
[C2] Class II				
[UNI] 120-277V 50/60Hz				
Luminaire body options				
[DPC] Double powder coating				