
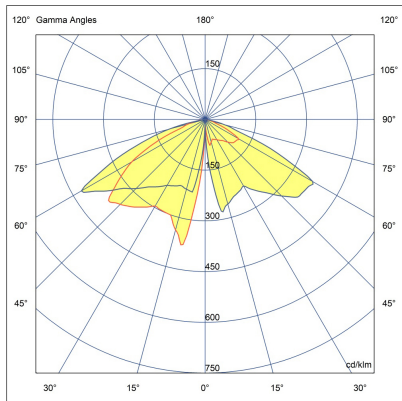


LB6052.509-US-SYM-3L-700-827

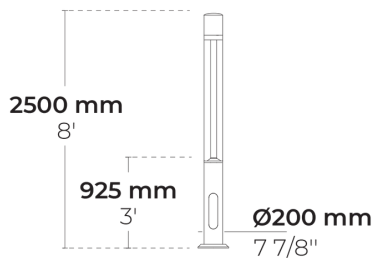

[SYM-3L]

Symmetric, Special  
effect: 3 lines

## Configuration

Light distribution	[SYM-3L] 38x117°
Delivered lumens flux	1514 lm
Rated input power	29 W
Color temperature	2700 K CRI 80
Luminaire efficacy	54 lm/W
Lamp	3 LED
Color Deviation	4 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600


## Options

## Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	68 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C


# Accessories (To be ordered separately)

## Anchor bolts



90CJ001  
90CJ001

## Bolt covers



C1J2K  
C1J2K

Project name				Type		Quantity	
Date		Note					

**LB6052.509-US-SYM-3L-700-827-\_\_-\_\_-\_\_**

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SYM-3L]</b> Symmetric, Special effect: 3 lines - 38x117°	<b>[700]</b> 29 W	<b>[827]</b> 2700 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black
	<b>[350]</b> 15 W	<b>[830]</b> 3000 K CRI 80	<b>[0-10V]</b> 0-10V	<b>[HM2]</b> Dark gray
		<b>[740]</b> 4000 K CRI 70		<b>[HM3]</b> Anthracite gray
		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b> Light gray
				<b>[HM5]</b> White
				<b>[HM6]</b> Bronze
				<b>[CC]</b> Custom color (Please specify RAL code)
<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>Luminaire body options</b>	<b>Anchor bolts</b>			
	<b>[90CJ001]</b> 90CJ001			
	<b>Bolt covers</b>			
	<b>[C1J2K]</b> C1J2K			
<b>[DPC]</b> Double powder coating				