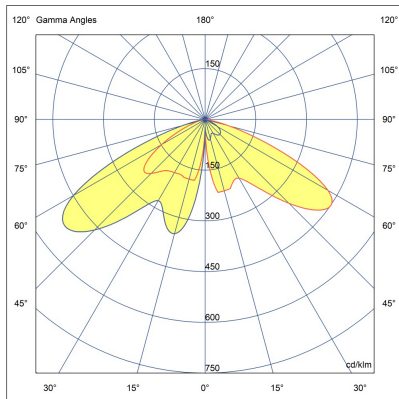
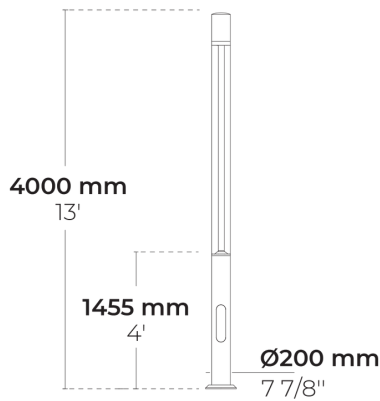


LB6053.509-US-SYM-3L-700-830-UNI-C1

**[SYM-3L]**Symmetric, Special  
effect: 3 lines

### Variant

<b>Light distribution</b>	[SYM-3L] 38x117°
<b>Delivered lumens flux</b>	1586 lm
<b>Rated input power</b>	29 W
<b>Colour temperature</b>	3000 K CRI 80
<b>Luminaire efficacy</b>	56 lm/W
<b>Lamp</b>	3 LED
<b>MacAdam Ellipse</b>	4 SDCM
<b>Lifetime L90B50 (hour)</b>	>72,600
<b>Lifetime L80B50 (hour)</b>	>72,600


### Options

### Technical information

<b>Housing</b>	Corrosion resistant, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Liquid silicone
<b>Lens / Reflector</b>	PMMA lens with high optical efficiency
<b>Glass / Diffuser</b>	Tempered safety glass
<b>Impact protection</b>	IK05
<b>Ingress protection</b>	IP65
<b>Input voltage</b>	120-277V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	89.5 lbs
<b>LED module</b>	Multi-chip high power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	6/6 kV
<b>Power factor</b>	> 0.95
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-40...50°C


# Accessories (To be ordered separately)

## Anchorage



90CJ003  
90CJ003

## Flange covers



C1J2K  
C1J2K

Project name		Type		Quantity	
Date		Note			
LB6053.509-US-SYM-3L-700-830-__-UNI-C1-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM-3L] Symmetric, Special effect: 3 lines - 38x117°	[700] 29 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black
	[1050] 42 W	[827] 2700 K CRI 80  [740] 4000 K CRI 70  [840] 4000 K CRI 80	[0-10V] 0-10V	[HM2] Dark grey  [HM3] Anthracite grey  [HM4] Light grey  [HM5] White  [HM6] Bronze  [CC] Custom colour (Please specify RAL code)
Extras	Accessories ( <i>To be ordered separately</i> )			
Luminaire body options	Anchorage			
	[90CJ003] 90CJ003			
[DPC] Double powder coating	Flange covers			
	[C1J2K] C1J2K			