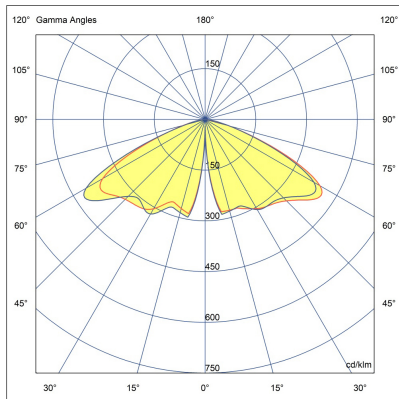
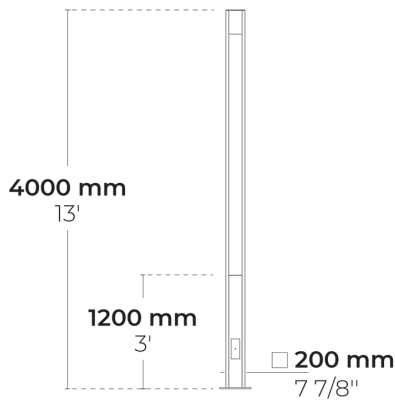


LB6056.510-EN-SYM-4L-1050-827-EN-C1

**[SYM-4L]**Symmetric, Special  
effect: 4 lines

### Variant

|                               |               |
|-------------------------------|---------------|
| <b>Light distribution</b>     | [SYM-4L] 120° |
| <b>Delivered lumens flux</b>  | 2874 lm       |
| <b>Rated input power</b>      | 56 W          |
| <b>Colour temperature</b>     | 2700 K CRI 80 |
| <b>Luminaire efficacy</b>     | 47 lm/W       |
| <b>Lamp</b>                   | 4 LED         |
| <b>MacAdam Ellipse</b>        | 3 SDCM        |
| <b>BUG rating</b>             | B1-U0-G1      |
| <b>Lifetime L90B50 (hour)</b> | >72,600       |
| <b>Lifetime L80B50 (hour)</b> | >72,600       |


### Options

### Technical information

|                                |                                                                           |
|--------------------------------|---------------------------------------------------------------------------|
| <b>Housing</b>                 | Corrosion resistant, extruded, marine grade aluminum housing              |
| <b>Finishing</b>               | Chromate conversion pretreatment followed by electrostatic powder coating |
| <b>Fasteners</b>               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| <b>Gasket</b>                  | Liquid silicone                                                           |
| <b>Lens / Reflector</b>        | PMMA lens with high optical efficiency                                    |
| <b>Glass / Diffuser</b>        | Tempered safety glass                                                     |
| <b>Impact protection</b>       | IK05                                                                      |
| <b>Ingress protection</b>      | IP65                                                                      |
| <b>Input voltage</b>           | 220-240V 50/60Hz                                                          |
| <b>Insulation class</b>        | Class I                                                                   |
| <b>Weight</b>                  | 33.5 kg                                                                   |
| <b>LED module</b>              | Multi-chip high power LEDs on metal-core PCB                              |
| <b>Driver</b>                  | Internal LED driver                                                       |
| <b>Driver surge protection</b> | 6/6 kV                                                                    |
| <b>Power factor</b>            | > 0.95                                                                    |
| <b>Through wiring</b>          | Single cable entry                                                        |
| <b>Operating temperature</b>   | -40...50°C                                                                |
| <b>Cable</b>                   | 0.5 m of flexible cable                                                   |


# Accessories (To be ordered separately)

## Anchorage



90CJ004  
90CJ004

## Flange covers



C3F2C.T001  
C3F2C.T001

|                                                 |  |      |  |          |  |
|-------------------------------------------------|--|------|--|----------|--|
| Project name                                    |  | Type |  | Quantity |  |
| Date                                            |  | Note |  |          |  |
| LB6056.510-EN-SYM-4L-1050-827-__-EN-C1-__-__-__ |  |      |  |          |  |

| Light distribution                                       | Rated input power                                   | Colour temperature     | Control           | Product colours                                                                                                                        |
|----------------------------------------------------------|-----------------------------------------------------|------------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| [SYM-4L]<br>Symmetric, Special<br>effect: 4 lines - 120° | [1050]<br>56 W                                      | [827]<br>2700 K CRI 80 | [ONOFF]<br>On/Off | [HM1]<br>Black                                      |
|                                                          | [700]<br>36 W                                       | [830]<br>3000 K CRI 80 | [DALI]<br>DALI    | [HM2]<br>Dark grey                                  |
|                                                          |                                                     | [740]<br>4000 K CRI 70 | [AUTO]<br>AutoDIM | [HM3]<br>Anthracite grey                            |
|                                                          |                                                     | [840]<br>4000 K CRI 80 | [STEP]<br>StepDIM | [HM4]<br>Light grey                                 |
|                                                          |                                                     |                        |                   | [HM5]<br>White                                      |
|                                                          |                                                     |                        |                   | [HM6]<br>Bronze                                     |
|                                                          |                                                     |                        |                   | [CC] <br>Custom colour (Please<br>specify RAL code) |
| Extras                                                   | Accessories ( <i>To be<br/>ordered separately</i> ) |                        |                   |                                                                                                                                        |
| Consult the factory                                      | Anchorages                                          |                        |                   |                                                                                                                                        |
| [UNI]<br>120-277V 50/60Hz                                | [90CJ004]<br>90CJ004                                |                        |                   |                                                                                                                                        |
| Luminaire body<br>options                                | Flange covers                                       |                        |                   |                                                                                                                                        |
| [DPC]<br>Double powder<br>coating                        | [C3F2C.T001]<br>C3F2C.T001                          |                        |                   |                                                                                                                                        |