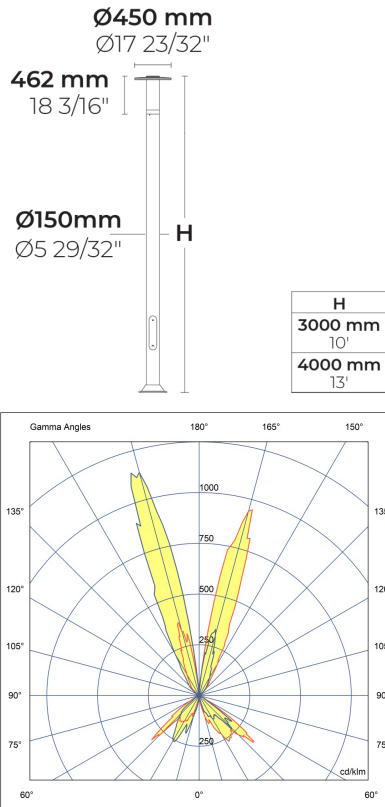


LB6058.694-EN-SYM-1050-840-EN-C1

PHASED-
OUT

[SYM]

Symmetric

Variant

Light distribution	[SYM] 98°
Delivered lumens flux	2700 lm
Rated input power	40 W
Colour temperature	4000 K CRI 80
Luminaire efficacy	67 lm/W
Lamp	3 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

Options

Technical information


Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	19.87 kg (3 m), 23.61 kg (4 m)
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Pole detail	Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately.

Notes

Embedded base is optional
Please contact the sales department regarding this product's availability.


Accessories (To be ordered separately)

Optical accessories




Hat for VLORA
100817064

Anchorage




90CJ004
90CJ004

Flanges



F0603B
F0603B

Flange covers



C1F2C
C1F2C

Project name		Type		Quantity	
Date		Note			
LB6058.694-EN-SYM-1050-840-__-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM] Symmetric - 98°	[1050] 40 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[HM1] Black
	[700] 26 W	[827] 2700 K CRI 80	[DALI] DALI	[HM2] Dark grey
		[830] 3000 K CRI 80		[HM3] Anthracite grey
		[740] 4000 K CRI 70		[HM4] Light grey
				[HM5] White
				[HM6] Bronze
				[CC] Custom colour (Please specify RAL code)
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H3] 3m	Consult the factory	Optical accessories		
[H4] 4m	[UNI] 120-277V 50/60Hz	[100817064] Hat for VLORA		
[HC]	Luminaire body options	Anchorage		
	[DPC] Double powder coating	[90CJ004] 90CJ004		
		Flanges		
		[F0603B] F0603B		
		Flange covers		
		[C1F2C] C1F2C		