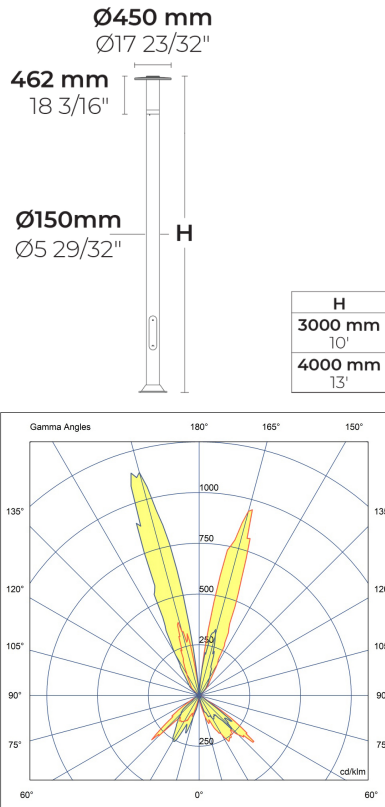


LB6058.694-EN-SYM-1050-840-EN-C1

PHASED-  
OUT[SYM]  
Symmetric

## Variant

Light distribution	[SYM] 98°
Delivered lumens flux	2700 lm
Rated input power	40 W
Colour temperature	4000 K CRI 80
Luminaire efficacy	67 lm/W
Lamp	3 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

## Options

## Technical information

Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	19.87 kg (3 m), 23.61 kg (4 m)
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Pole detail	Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional

## Notes

Please contact the sales department regarding this product's availability.

## Accessories (To be ordered separately)


### Optical accessories



**Hat for VLORA**

100817064


### Anchorage



**90CJ004**

90CJ004


### Flanges



**F0603B**

F0603B

### Flange covers



**C1F2C**

C1F2C

Project name		Type		Quantity	
Date		Note			
LB6058.694-EN-SYM-1050-840-__-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM] Symmetric - 98°	[1050] 40 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[HM1] Black
	[700] 26 W	[827] 2700 K CRI 80	[DALI] DALI	[HM2] Dark grey
		[830] 3000 K CRI 80		[HM3] Anthracite grey
		[740] 4000 K CRI 70		[HM4] Light grey
				[HM5] White
				[HM6] Bronze
				[CC] Custom colour (Please specify RAL code)
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
[H3] 3m	Consult the factory	Optical accessories		
[H4] 4m	[UNI] 120-277V 50/60Hz	[100817064] Hat for VLORA		
[HC]	Luminaire body options	Anchorage		
	[DPC] Double powder coating	[90CJ004] 90CJ004		
		Flanges		
		[F0603B] F0603B		
		Flange covers		
		[C1F2C] C1F2C		