
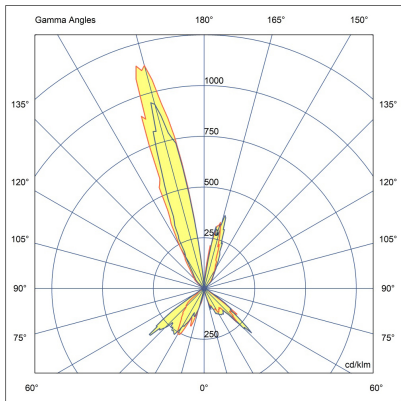


LB6058.694-US-SYM-1050-840

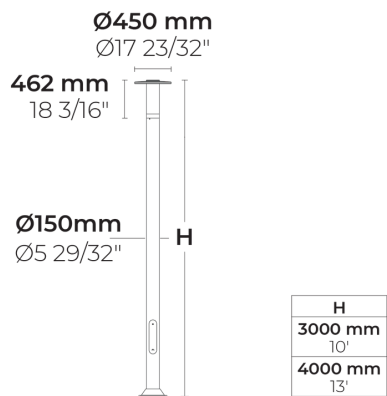

[SYM]  
Symmetric

## Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [SYM] 98°     |
| Delivered lumens flux | 2700 lm       |
| Rated input power     | 40 W          |
| Color temperature     | 4000 K CRI 80 |
| Luminaire efficacy    | 67 lm/W       |
| Lamp                  | 3 LED         |
| Color Deviation       | 5 SDCM        |
| Lifetime L90 (hour)   | >72,600       |
| Lifetime L80 (hour)   | >72,600       |

## Options

## Technical information


|                         |                                                                                                                          |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Housing                 | Corrosion resistant, die-cast, marine grade aluminum housing                                                             |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating                                                |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                                                             |
| Gasket                  | Silicone                                                                                                                 |
| Lens / Reflector        | High reflectance aluminium coating                                                                                       |
| Glass / Diffuser        | Tempered safety glass                                                                                                    |
| Impact protection       | IK07                                                                                                                     |
| Ingress protection      | IP65                                                                                                                     |
| Input voltage           | 120-277V 50/60Hz                                                                                                         |
| Insulation class        | Class I                                                                                                                  |
| Weight                  | 43.7 lbs (10'), 51.9 lbs (13')                                                                                           |
| LED module              | Multi-chip high power LEDs on metal-core PCB                                                                             |
| Driver                  | Internal LED driver                                                                                                      |
| Driver surge protection | 6/6 kV                                                                                                                   |
| Power factor            | > 0.95                                                                                                                   |
| Through wiring          | Single power cord entry                                                                                                  |
| Operating temperature   | -40...50°C                                                                                                               |
| Pole detail             | Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately.<br>Embedded base is optional |

## Notes

Please contact the sales department regarding this product's availability.


Accessories (Included)

Base plates



F0603B  
F0603B

Bolt covers



C1F2C  
C1F2C


Accessories (To be ordered separately)

Optical accessories



Hat for VLORA  
100817064

Anchor bolts



90CJ004  
90CJ004

|                                        |  |      |  |      |  |          |  |
|----------------------------------------|--|------|--|------|--|----------|--|
| Project name                           |  |      |  | Type |  | Quantity |  |
| Date                                   |  | Note |  |      |  |          |  |
| LB6058.694-US-SYM-1050-840-__-__-__-__ |  |      |  |      |  |          |  |

| Light distribution       | Rated input power              | Color temperature         | Control                                | Product colors                                 |
|--------------------------|--------------------------------|---------------------------|----------------------------------------|------------------------------------------------|
| [SYM]<br>Symmetric - 98° | [1050]<br>40 W                 | [840]<br>4000 K CRI 80    | [ONOFF]<br>On/Off                      | [HM1]<br>Black                                 |
|                          | [700]<br>26 W                  | [827]<br>2700 K CRI 80    | [0-10V]<br>0-10V                       | [HM2]<br>Dark gray                             |
|                          |                                | [830]<br>3000 K CRI 80    |                                        | [HM3]<br>Anthracite gray                       |
|                          |                                |                           |                                        | [HM4]<br>Light gray                            |
|                          |                                |                           |                                        | [HM5]<br>White                                 |
|                          |                                |                           |                                        | [HM6]<br>Bronze                                |
|                          |                                |                           |                                        | [CC]<br>Custom color (Please specify RAL code) |
| Height                   | Extras                         | Accessories<br>(Included) | Accessories (To be ordered separately) |                                                |
| [H3]<br>10'              | Luminaire body options         | Base plates               | Optical accessories                    |                                                |
| [H4]<br>13.1'            | [DPC]<br>Double powder coating | [F0603B]<br>F0603B        | [100817064]<br>Hat for VLORA           |                                                |
| [HC]                     |                                | Bolt covers               | Anchor bolts                           |                                                |
|                          |                                | [C1F2C]<br>C1F2C          | [90CJ004]<br>90CJ004                   |                                                |