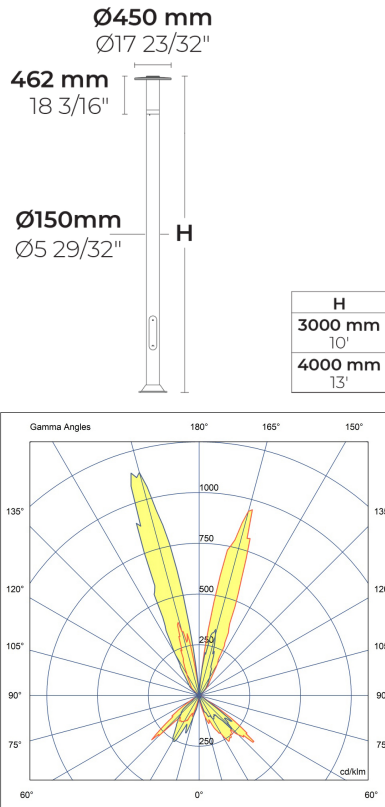


LB6058.694-EN-SYM-700-740-EN-C1

PHASED-
OUT[SYM]
Symmetric

Variant

| | |
|------------------------|---------------|
| Light distribution | [SYM] 98° |
| Delivered lumens flux | 1881 lm |
| Rated input power | 26 W |
| Colour temperature | 4000 K CRI 70 |
| Luminaire efficacy | 72 lm/W |
| Lamp | 3 LED |
| MacAdam Ellipse | 5 SDCM |
| Lifetime L90B50 (hour) | >72,600 |
| Lifetime L80B50 (hour) | >72,600 |

Options

Technical information

| | |
|-------------------------|---|
| Housing | Corrosion resistant, die-cast, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone |
| Lens / Reflector | High reflectance aluminium coating |
| Glass / Diffuser | Tempered safety glass |
| Impact protection | IK07 |
| Ingress protection | IP65 |
| Input voltage | 220-240V 50/60Hz |
| Insulation class | Class I |
| Weight | 19.87 kg (3 m), 23.61 kg (4 m) |
| LED module | Multi-chip high power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 6/6 kV |
| Power factor | > 0.95 |
| Through wiring | Single cable entry |
| Operating temperature | -40...50°C |
| Pole detail | Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional |

Notes

Please contact the sales department regarding this product's availability.


Accessories (To be ordered separately)

Optical accessories




Hat for VLORA
100817064

Anchorage




90CJ004
90CJ004

Flanges



F0603B
F0603B

Flange covers



C1F2C
C1F2C

| | | | | | |
|--|--|------|--|----------|--|
| Project name | | Type | | Quantity | |
| Date | | Note | | | |
| LB6058.694-EN-SYM-700-740-__-EN-C1-__-__-__-__ | | | | | |

| Light distribution | Rated input power | Colour temperature | Control | Product colours |
|--------------------------|--------------------------------|---|-------------------|---|
| [SYM] Symmetric - 98° | [700] 26 W | [740] 4000 K CRI 70 | [ONOFF] On/Off | [HM1] Black |
| | [1050] 40 W | [827] 2700 K CRI 80 | [DALI] DALI | [HM2] Dark grey |
| | | [830] 3000 K CRI 80 | | [HM3] Anthracite grey |
| | | [840] 4000 K CRI 80 | | [HM4] Light grey |
| | | | | [HM5] White |
| | | | | [HM6] Bronze |
| | | | | [CC] Custom colour (Please specify RAL code) |
| Height | Extras | Accessories (<i>To be ordered separately</i>) | | |
| [H3] 3m | Consult the factory | Optical accessories | | |
| [H4] 4m | [UNI] 120-277V 50/60Hz | [100817064] Hat for VLORA | | |
| [HC] | Luminaire body options | Anchorage | | |
| | [DPC] Double powder coating | [90CJ004] 90CJ004 | | |
| | | Flanges | | |
| | | [F0603B] F0603B | | |
| | | Flange covers | | |
| | | [C1F2C] C1F2C | | |