
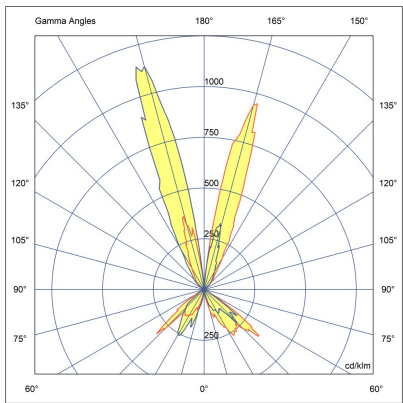


LB6058.694-EN-SYM-700-740

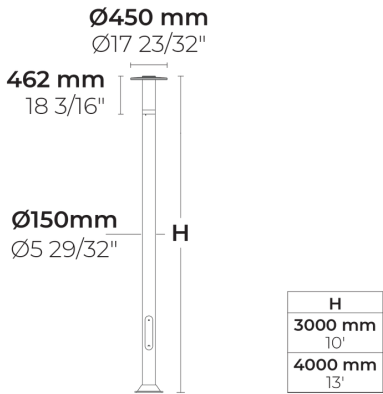

[SYM]  
Symmetric

## Configuration

Light distribution	[SYM] 98°
Delivered lumens flux	1881 lm
Rated input power	26 W
Color temperature	4000 K CRI 70
Luminaire efficacy	72 lm/W
Lamp	3 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

## Options

## Technical information

Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	19.87 kg (3 m), 23.61 kg (4 m)
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Pole detail	Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional

## Notes

Please contact the sales department regarding this product's availability.


# Accessories (To be ordered separately)

## Optical accessories




**Hat for VLORA**  
100817064

## Anchor bolts




**90CJ004**  
90CJ004

## Base plates










**F0603B**  
F0603B

## Bolt covers



**C1F2C**  
C1F2C

Project name					Type		Quantity	
Date			Note					
LB6058.694-EN-SYM-700-740-__-__-__-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors	
[SYM] Symmetric - 98°	[700] 26 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black	
	[1050] 40 W	[827] 2700 K CRI 80	[DALI] DALI	[HM2] Dark gray	
		[830] 3000 K CRI 80		[HM3] Anthracite gray	
		[840] 4000 K CRI 80		[HM4] Light gray	
		[HM5] White			
		[HM6] Bronze			
		[CC] Custom color (Please specify RAL code)			
Height	Extras	Accessories ( <i>To be ordered separately</i> )			
[H3] 10'  [H4] 13.1'  [HC]	Consult the factory	Optical accessories			
	[UNI] 120-277V 50/60Hz	[100817064] Hat for VLORA			
	Luminaire body options	Anchor bolts			
		[90CJ004] 90CJ004			
	[DPC] Double powder coating	Base plates			
		[F0603B] F0603B			
		Bolt covers			
		[C1F2C] C1F2C			