
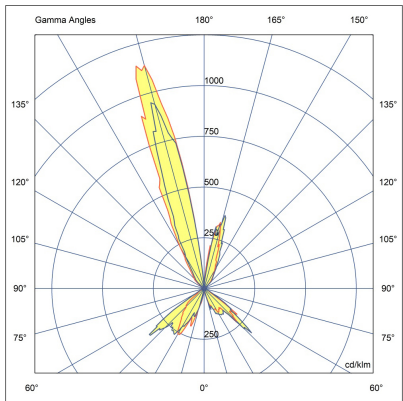
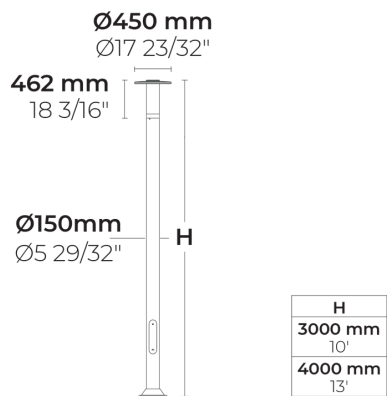


LB6058.694-US-SYM-700-830

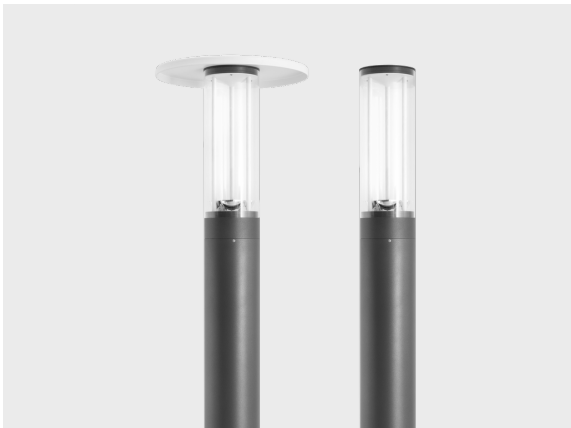

[SYM]
Symmetric

Configuration

Light distribution	[SYM] 98°
Delivered lumens flux	1568 lm
Rated input power	26 W
Color temperature	3000 K CRI 80
Luminaire efficacy	60 lm/W
Lamp	3 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

Options

Technical information


Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	43.7 lbs (10'), 51.9 lbs (13')
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Pole detail	Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional

Notes

Please contact the sales department regarding this product's availability.


Accessories (Included)

Base plates



F0603B
F0603B

Bolt covers



C1F2C
C1F2C


Accessories (To be ordered separately)

Optical accessories



Hat for VLORA
100817064

Anchor bolts



90CJ004
90CJ004

Project name				Type		Quantity	
Date		Note					

LB6058.694-US-SYM-700-830-__-__-__-__

Light distribution	Rated input power	Color temperature	Control	Product colors
<div>[SYM]</div> <div>Symmetric - 98°</div>	<div>[700]</div> <div>26 W</div>	<div>[830]</div> <div>3000 K CRI 80</div>	<div>[ONOFF]</div> <div>On/Off</div>	<div>[HM1]</div> <div>Black</div> <div></div> <div>[HM2]</div> <div>Dark gray</div> <div></div> <div>[HM3]</div> <div>Anthracite gray</div> <div></div> <div>[HM4]</div> <div>Light gray</div> <div></div> <div>[HM5]</div> <div>White</div> <div></div> <div>[HM6]</div> <div>Bronze</div> <div></div> <div>[CC]</div> <div>Custom color (Please specify RAL code)</div> <div></div>
	<div>[1050]</div> <div>40 W</div>	<div>[827]</div> <div>2700 K CRI 80</div> <div>[740]</div> <div>4000 K CRI 70</div> <div>[840]</div> <div>4000 K CRI 80</div>	<div>[0-10V]</div> <div>0-10V</div>	
Height	Extras	Accessories (Included)	Accessories (To be ordered separately)	
<div>[H3]</div> <div>10'</div> <div>[H4]</div> <div>13.1'</div> <div>[HC]</div>	<div>Luminaire body options</div> <div>[DPC]</div> <div>Double powder coating</div>	Base plates	Optical accessories	
		[F0603B] F0603B	[100817064] Hat for VLORA	
		Bolt covers	Anchor bolts	
		[C1F2C] C1F2C	[90CJ004] 90CJ004	