



PIRUS Pendant, 360°, 3 Module

CE UK CA IK08 IP65

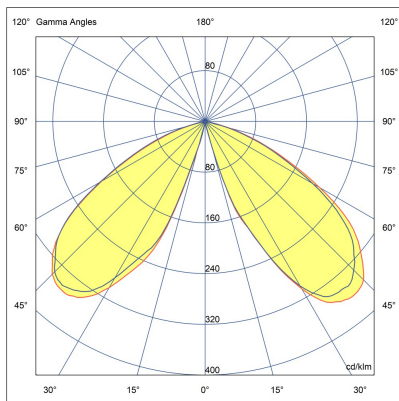

LP4076.846-EN-SYM-1050-827-EN-C1

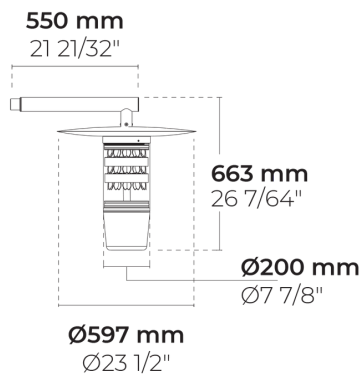

[SYM]
Symmetric

Variant

Light distribution	[SYM] 118°
Delivered lumens flux	6140 lm
Rated input power	78 W
Colour temperature	2700 K CRI 80
Luminaire efficacy	78 lm/W
Lamp	36 LED
MacAdam Ellipse	3 SDCM
BUG rating	B2-U0-G1
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000

Options

Technical information

Mounting	Post pendant mounting
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	9.91 kg
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

Poles (To be ordered separately)

Conical aluminum poles with flange plate



Product code	Height	Diameter / Dimensions	Spigot diameter
PAFK.D114	3m, 4m, 5m m	Ø114mm	Ø60mm, Ø76mm mm
PAFK.D122	4m, 5m, 6m m	Ø122mm	Ø60mm, Ø76mm mm
PAFK.D148	6m, 7m, 8m m	Ø148mm	Ø60mm, Ø76mm mm
PAFK.D165	6m, 7m, 8m, 9m m	Ø165mm	Ø76mm, Ø90mm mm
PAFK.D180	10m, 8m, 9m m	Ø180mm	Ø76mm, Ø90mm mm
PAFK.D200	10m, 11m, 12m m	Ø200mm	Ø76mm, Ø90mm mm

Conical aluminum poles with embedded base



Product code	Height	Diameter / Dimensions	Spigot diameter
PABK.D114	3m, 4m, 5m m	Ø114mm	Ø60mm, Ø76mm mm
PABK.D122	4m, 5m, 6m, 7m m	Ø122mm	Ø60mm, Ø76mm mm
PABK.D148	6m, 7m, 8m m	Ø148mm	Ø60mm, Ø76mm mm
PABK.D165	6m, 7m, 8m, 9m m	Ø165mm	Ø76mm, Ø90mm mm
PABK.D180	10m, 8m, 9m m	Ø180mm	Ø76mm, Ø90mm mm
PABK.D200	10m, 11m, 12m m	Ø200mm	Ø76mm, Ø90mm mm

Cylindrical aluminum poles with flange plate



Product code	Height	Diameter / Dimensions	Spigot diameter
PAFC.D114	3m, 4m, 5m m	Ø114mm	Ø114mm mm
PAFC.D122	3m, 4m, 5m, 6m m	Ø122mm	Ø122mm mm
PAFC.D148	6m, 7m, 8m m	Ø148mm	Ø148mm mm
PAFC.D165	6m, 7m, 8m, 9m m	Ø165mm	Ø165mm mm

Project name				Type		Quantity	
Date		Note					
LP4076.846-EN-SYM-1050-827-__-EN-C1-__-__							
Light distribution	Rated input power	Colour temperature	Control	Product colours			
[SYM] Symmetric - 118°	[1050] 78 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM1] Black			
		[830] 3000 K CRI 80	[DALI] DALI	[HM2] Dark grey			
		[740] 4000 K CRI 70	[AUTO] AutoDIM	[HM3] Anthracite grey			
		[840] 4000 K CRI 80	[STEP] StepDIM	[HM4] Light grey			
				[HM5] White			
				[HM6] Bronze			
				[CC] Custom colour (Please specify RAL code)			
Extras							
Consult the factory							
[UNI] 120-277V 50/60Hz							