



PINA Flood

CE UK CA IK06 IP65

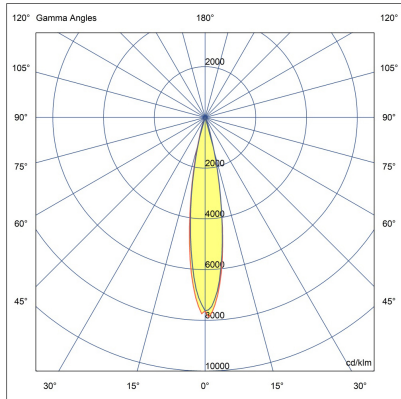

LF8033.003-EN-VN-930-ONOFF-EN-C1

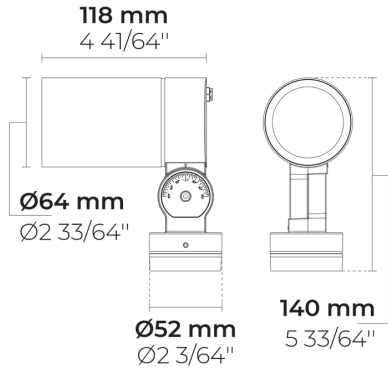

[VN]

Very narrow

Variant

Light distribution	[VN] 10°
Delivered lumens flux	390 lm
Rated input power	7.5 W
Colour temperature	3000 K CRI 90
Luminaire efficacy	52 lm/W
Lamp	1 LAMP
MacAdam Ellipse	5 SDCM

Options

Technical information

Mounting	Surface mountable via a stationery base (standard) or spike (optional)
Tilt angle	+90°/-80°
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	Tempered safety glass
Impact protection	IK06
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.01 m ²
Weight	0.43 kg
Driver	Internal LED driver
Power factor	> 0.80
Through wiring	Single cable entry
Cable	0.4 m of flexible cable


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 08.05.2024.
For current version visit heperlighting.com. All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Mounting accessories



Spike

160405040

Project name					Type		Quantity	
Date		Note						
LF8033.003-EN-VN-930-ONOFF-EN-C1-__-__								

Light distribution	Rated input power	Colour temperature	Control	Product colours	
[VN] Very narrow - 10°	[I] 7.5 W	[930] 3000 K CRI 90	[ONOFF] On/Off	[HM1] Black	
[N] Narrow - 25°		[927] 2700 K CRI 90		[HM2] Dark grey	
[MN] Medium narrow - 36°		[940] 4000 K CRI 90		[HM3] Anthracite grey	
[M] Medium - 60°				[HM4] Light grey	
				[HM5] White	
				[HM6] Bronze	
				[CC] Custom colour (Please specify RAL code)	
Extras	Accessories (<i>To be ordered separately</i>)				
Consult the factory	Mounting accessories				
[UNI] 120-277V 50/60Hz	[160405040] Spike				