



PINA Flood

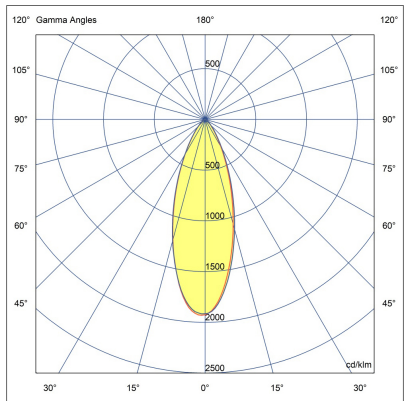

LF8033.003-EN-MN-940-ONOFF

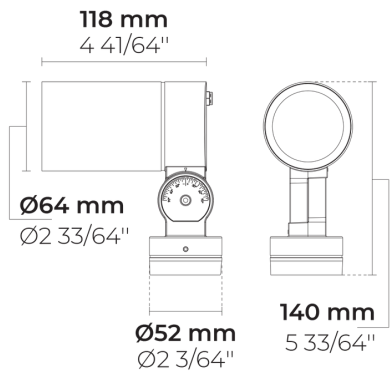

[MN]

Medium narrow -
NEMA Type 3

Configuration

Light distribution	[MN] 36°
Delivered lumens flux	410 lm
Rated input power	7.5 W
Color temperature	4000 K CRI 90
Luminaire efficacy	55 lm/W
Lamp	1 LAMP
Color Deviation	5 SDCM

Options

Technical information

Mounting	Pedestal knuckle mount (standard), stake mount (optional)
Tilt angle	+90°/-80°
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	Tempered safety glass
Impact protection	IK06
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.01 m ²
Weight	0.43 kg
Driver	Internal LED driver
Power factor	> 0.80
Through wiring	Single power cord entry
Power cord	16" of flexible power cord

Accessories (To be ordered separately)

Mounting accessories



Spike

160405040

Project name				Type		Quantity	
Date		Note					

LF8033.003-EN-MN-940-ONOFF-__-__

Light distribution	Rated input power	Color temperature	Control	Product colors
<div>[MN] Medium narrow - NEMA Type 3 - 36°</div> <div>[VN] Very narrow - NEMA Type 1 - 10°</div> <div>[N] Narrow - NEMA Type 2 - 25°</div> <div>[M] Medium - NEMA Type 4 - 60°</div>	<div>[I] 7.5 W</div>	<div>[940] 4000 K CRI 90</div> <div>[927] 2700 K CRI 90</div> <div>[930] 3000 K CRI 90</div>	<div>[ONOFF] On/Off</div>	<div>[HM1] Black</div> <div>[HM2] Dark gray</div> <div>[HM3] Anthracite gray</div> <div>[HM4] Light gray</div> <div>[HM5] White</div> <div>[HM6] Bronze</div> <div>[CC] Custom color (Please specify RAL code)</div>
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Mounting accessories			
[UNI] 120-277V 50/60Hz	[160405040] Spike			