



# PINA Flood



IK06 IP65



LF8033.003-US-VN-940-UNI-C1

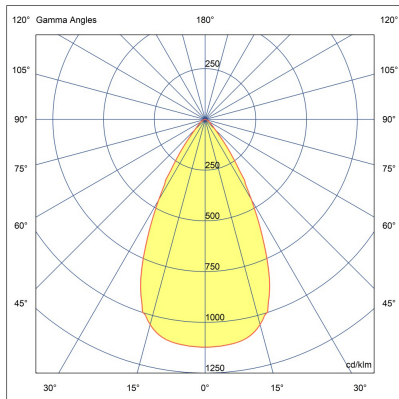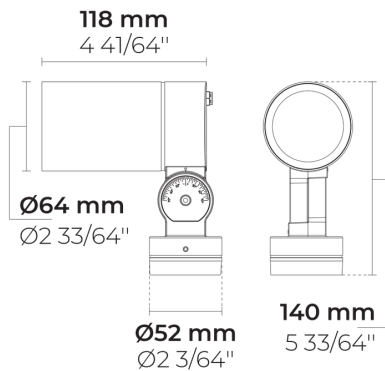

[VN]

Very narrow

## Variant

Light distribution	[VN] 10°
Delivered lumens flux	410 lm
Rated input power	7.5 W
Colour temperature	4000 K CRI 90
Luminaire efficacy	55 lm/W
Lamp	1 LAMP
MacAdam Ellipse	5 SDCM

## Options

## Technical information

Mounting	Surface mountable via a stationery base (standard) or spike (optional)
Tilt angle	+90°/-80°
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	Tempered safety glass
Impact protection	IK06
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.11 ft²
Weight	0.9 lbs
Driver	Internal LED driver
Power factor	> 0.93
Through wiring	Single cable entry
Cable	0.4 m of flexible cable
Notes	Louver Snap Lens can not be combined with other lenses.

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 07.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

---








### Mounting accessories



**Spike**

160405040

Project name					Type		Quantity	
Date			Note					
LF8033.003-US-VN-940-__-UNI-C1-__								

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[VN]</b> Very narrow - 10°	<b>[I]</b> 7.5 W	<b>[940]</b> 4000 K CRI 90	<b>[ONOFF]</b> On/Off  <b>[PD]</b> Phase dimming	<b>[HM1]</b> Black 
<b>[N]</b> Narrow - 25°		<b>[927]</b> 2700 K CRI 90		<b>[HM2]</b> Dark grey 
<b>[MN]</b> Medium narrow - 36°		<b>[930]</b> 3000 K CRI 90		<b>[HM3]</b> Anthracite grey 
<b>[M]</b> Medium - 60°				<b>[HM4]</b> Light grey 
				<b>[HM5]</b> White 
				<b>[HM6]</b> Bronze 
				<b>[CC]</b> Custom colour (Please specify RAL code) 
<b>Accessories (<i>To be ordered separately</i>)</b>				
<b>Mounting accessories</b>				
<b>[160405040]</b> Spike				