



PINA Flood



IK06 IP65



LF8033.003-US-VN-940-UNI-C1

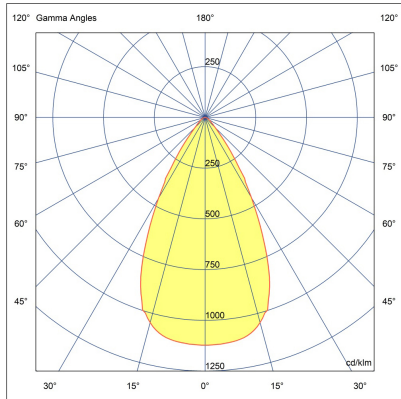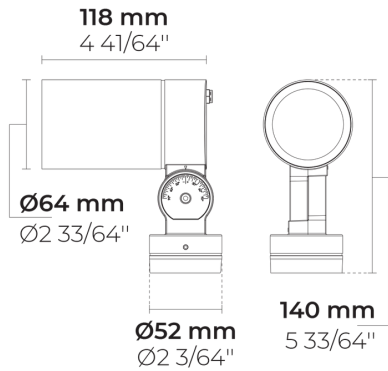

[VN]

Very narrow

Variant

Light distribution	[VN] 10°
Delivered lumens flux	410 lm
Rated input power	7.5 W
Colour temperature	4000 K CRI 90
Luminaire efficacy	55 lm/W
Lamp	1 LAMP
MacAdam Ellipse	5 SDCM

Options

Technical information

Mounting	Surface mountable via a stationery base (standard) or spike (optional)
Tilt angle	+90°/-80°
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	Tempered safety glass
Impact protection	IK06
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.11 ft²
Weight	0.9 lbs
Driver	Internal LED driver
Power factor	> 0.93
Through wiring	Single cable entry
Cable	0.4 m of flexible cable
Notes	Louver Snap Lens can not be combined with other lenses.

Accessories (To be ordered separately)

Mounting accessories



Spike

160405040

Project name		Type		Quantity	
Date		Note			
LF8033.003-US-VN-940-__-UNI-C1-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[VN] Very narrow - 10°	[I] 7.5 W	[940] 4000 K CRI 90	[ONOFF] On/Off	[HM1] Black 
[N] Narrow - 25°		[927] 2700 K CRI 90	[PD] Phase dimming	[HM2] Dark grey 
[MN] Medium narrow - 36°		[930] 3000 K CRI 90		[HM3] Anthracite grey 
[M] Medium - 60°				[HM4] Light grey 
				[HM5] White 
				[HM6] Bronze 
				[CC]  Custom colour (Please specify RAL code)
Accessories (<i>To be ordered separately</i>)				
Mounting accessories				
[160405040] Spike				