



PINA W Duo

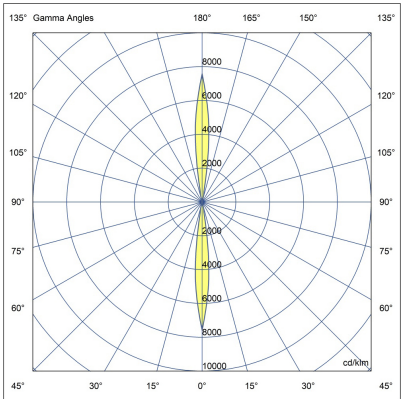

LW8033.003-US-VN-VN-940

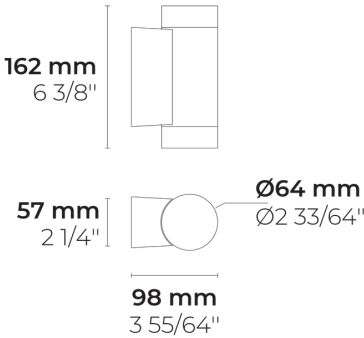

[VN]

Very narrow - NEMA
Type I

Configuration








| | |
|-----------------------|---------------|
| Light distribution | [VN] 10° |
| Delivered lumens flux | 820 lm |
| Rated input power | 15 W |
| Color temperature | 4000 K CRI 90 |
| Luminaire efficacy | 54 lm/W |
| Lamp | 2 LAMP |
| Color Deviation | 5 SDCM |

Options

Technical information

| | |
|--------------------|---|
| Mounting | Wall mountable |
| Housing | Corrosion resistant, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK06 |
| Ingress protection | IP65 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 0.9 lbs |
| Driver | Internal LED driver |
| Power factor | > 0.93 |
| Through wiring | Single power cord entry |
| Power cord | 8" of flexible power cord |

| | | | | | | | | |
|-------------------------------|--|--|------|--|------|--|----------|--|
| Project name | | | | | Type | | Quantity | |
| Date | | | Note | | | | | |
| LW8033.003-US-VN-VN-940-__-__ | | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|--|--------------------|-------------------------------|------------------------------|---|
| [VN] Very narrow - NEMA Type 1 - 10° | [I] 15 W | [940] 4000 K CRI 90 | [ONOFF] On/Off | [HM1]  Black |
| [N] Narrow - NEMA Type 2 - 25° | | [927] 2700 K CRI 90 | [PD] Phase dimming | [HM2]  Dark gray |
| [MN] Medium narrow - NEMA Type 3 - 36° | | [930] 3000 K CRI 90 | | [HM3]  Anthracite gray |
| [M] Medium - NEMA Type 4 - 60° | | | | [HM4]  Light gray |
| | | | | [HM5]  White |
| | | | | [HM6]  Bronze |
| | | | | [CC]  Custom color (Please specify RAL code) |