



# PINA W Duo

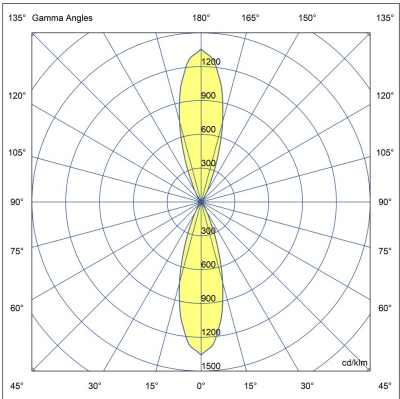

LW8033.003-US-MN-MN-930

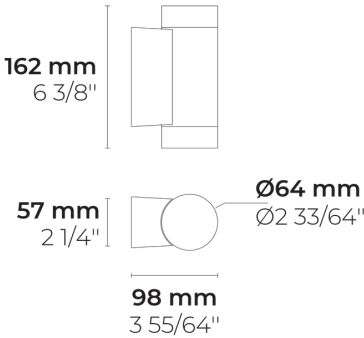

[MN]

Medium narrow -  
NEMA Type 3

## Configuration

Light distribution	[MN] 36°
Delivered lumens flux	773 lm
Rated input power	15 W
Color temperature	3000 K CRI 90
Luminaire efficacy	51 lm/W
Lamp	2 LAMP
Color Deviation	5 SDCM

## Options

## Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	Tempered safety glass
Impact protection	IK06
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	0.9 lbs
Driver	Internal LED driver
Power factor	> 0.93
Through wiring	Single power cord entry
Power cord	8" of flexible power cord

Project name				Type		Quantity	
Date		Note					
LW8033.003-US-MN-MN-930-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<div><div>[MN] Medium narrow - NEMA Type 3 - 36°</div><div>[VN] Very narrow - NEMA Type 1 - 10°</div><div>[N] Narrow - NEMA Type 2 - 25°</div><div>[M] Medium - NEMA Type 4 - 60°</div></div>	<div>[ ] 15 W</div>	<div><div>[930] 3000 K CRI 90</div><div>[927] 2700 K CRI 90</div><div>[940] 4000 K CRI 90</div></div>	<div><div>[ONOFF] On/Off</div><div>[PD] Phase dimming</div></div>	<div><div>[HM1] Black</div><div>[HM2] Dark gray</div><div>[HM3] Anthracite gray</div><div>[HM4] Light gray</div><div>[HM5] White</div><div>[HM6] Bronze</div><div>[CC] Custom color (Please specify RAL code)</div></div>