



PINA W Duo

CE UK CA IK06 IP65

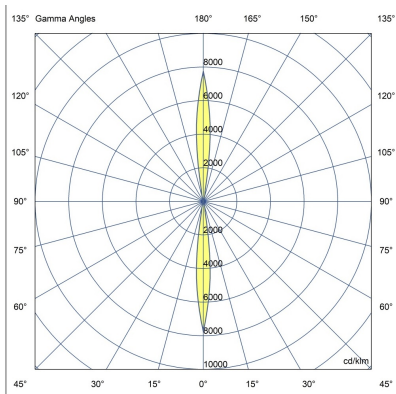

LW8033.003-EN-VN-VN-930-ONOFF-EN-C1

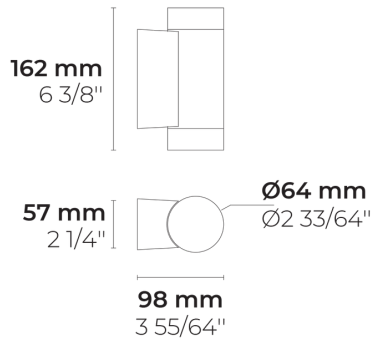

[VN]

Very narrow

Variant

Light distribution	[VN] 10°
Delivered lumens flux	773 lm
Rated input power	15 W
Colour temperature	3000 K CRI 90
Luminaire efficacy	51 lm/W
Lamp	2 LAMP
MacAdam Ellipse	5 SDCM

Options

Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	Tempered safety glass
Impact protection	IK06
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	0.43 kg
Driver	Internal LED driver
Power factor	> 0.80
Through wiring	Single cable entry
Cable	0.2 m of flexible cable

HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 17.05.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name				Type		Quantity	
Date			Note				
LW8033.003-EN-VN-VN-930-ONOFF-EN-C1-__-__							
Light distribution	Rated input power	Colour temperature	Control	Product colours			
[VN] Very narrow - 10°	[I] 15 W	[930] 3000 K CRI 90	[ONOFF] On/Off	[HM1] Black			
[N] Narrow - 25°		[927] 2700 K CRI 90		[HM2] Dark grey			
[MN] Medium narrow - 36°		[940] 4000 K CRI 90		[HM3] Anthracite grey			
[M] Medium - 60°				[HM4] Light grey			
				[HM5] White			
				[HM6] Bronze			
				[CC] Custom colour (Please specify RAL code)			
Extras							
Consult the factory							
[UNI] 120-277V 50/60Hz							