

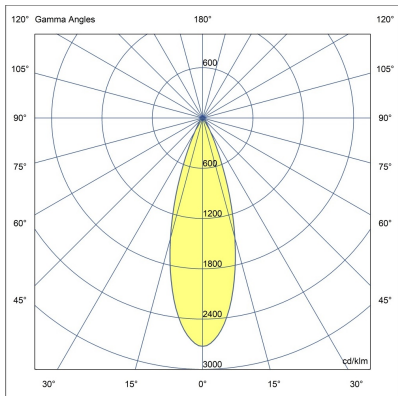


# PINA W

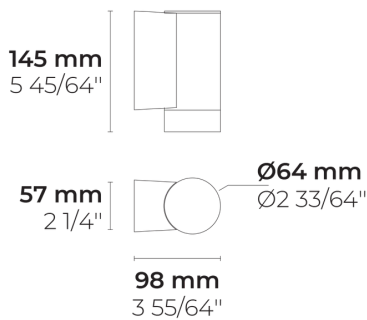

LW8034.003-EN-MN-940-ONOFF

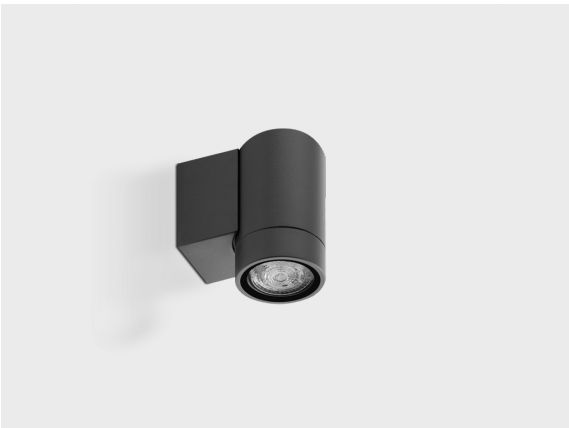

[N]

Narrow - NEMA Type 2

## Configuration

Light distribution	[N] 25°
Delivered lumens flux	410 lm
Rated input power	7.5 W
Color temperature	4000 K CRI 90
Luminaire efficacy	55 lm/W
Lamp	1 LAMP
Color Deviation	5 SDCM
BUG rating	B1-U0-G0

## Options

## Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffuser	Tempered safety glass
Impact protection	IK06
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	0.71 kg
Driver	Internal LED driver
Power factor	> 0.80
Through wiring	Single power cord entry
Power cord	8" of flexible power cord
Packing box dimensions	11*18*7 cm

Project name				Type		Quantity	
Date		Note					

LW8034.003-EN-MN-940-ONOFF-\_\_-\_\_

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[N]</b> Narrow - NEMA Type 2 - 25°	<b>[I]</b> 7.5 W	<b>[940]</b> 4000 K CRI 90	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black
<b>[VN]</b> Very narrow - NEMA Type 1 - 10°		<b>[927]</b> 2700 K CRI 90		<b>[HM2]</b> Dark gray
<b>[MN]</b> Medium narrow - NEMA Type 3 - 36°		<b>[930]</b> 3000 K CRI 90		<b>[HM3]</b> Anthracite gray
<b>[M]</b> Medium - NEMA Type 4 - 60°				<b>[HM4]</b> Light gray
				<b>[HM5]</b> White
				<b>[HM6]</b> Bronze
				<b>[CC]</b> Custom color (Please specify RAL code)

Extras

Consult the factory

**[UNI]**  
120-277V 50/60Hz