


HANDRA Side - Ø2"



LH5005.595-EN-SLSH-700-740



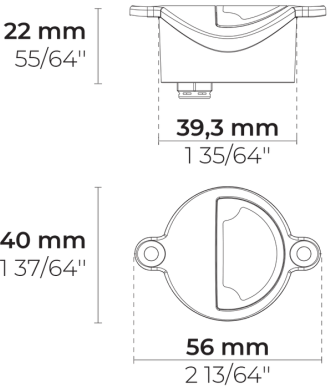


Options








Technical information

Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid gasket
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP65
Input voltage	3 Vdc (Max) 350 mA
Insulation class	Class III
Weight	0.05 kg
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single power cord entry
Operating temperature	-25...50°C
Power cord	8" of flexible power cord
Packing box dimensions	7*7*7 cm
Notes	QUICK SHIP: Some variants will be delivered faster. Please consult the factory.

Accessories (To be ordered separately)

Mounting accessories	Mounting accessories	Mounting accessories
		
DALI & On/Off driver within an IP67 box for 1 to 6 HANDRA modules	DALI & On/Off driver within an IP67 box for 7 to 15 HANDRA modules	DALI & On/Off driver within an IP67 box for 16 to 35 HANDRA modules
007502063	007502064	007502065

Project name					Type		Quantity	
Date			Note					
LH5005.595-EN-SLSH-700-740-__ - __								

Light distribution	Rated input power	Color temperature	Control	Product colors
<div></div> [SLSH] Special linear, Side throw - 42x54°	[350] 1 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Accessories (<i>To be ordered separately</i>)				
Mounting accessories				
[007502063] DALI & On/Off driver within an IP67 box for 1 to 6 HANDRA modules				
[007502064] DALI & On/Off driver within an IP67 box for 7 to 15 HANDRA modules				
[007502065] DALI & On/Off driver within an IP67 box for 16 to 35 HANDRA modules				