

HELIOS 1 Module


CE UK CA IK07 IP65



LP4036.771-EN-SYM-3L-700-740-EN-C1



PHASED-
OUT

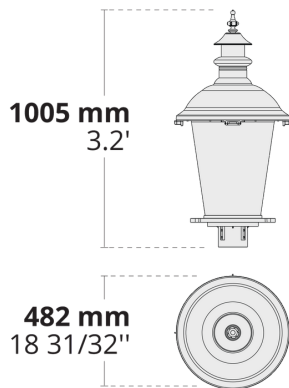

[SYM-3L]

Symmetric, Special
effect: 3 lines

Variant

Light distribution	[SYM-3L] 360x65°
Delivered lumens flux	4200 lm
Rated input power	38 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	111 lm/W
Lamp	16 LED
MacAdam Ellipse	5 SDCM
BUG rating	B3-U0-G1
Lifetime L90B50 (hour)	>108,000
Lifetime L80B50 (hour)	>108,000

Options

Technical information

Mounting	Direct pole or side bracket mountable. Spigot: Ø60 mm x 100 mm
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.24 m²
Weight	4.86 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable
Notes	Please contact the sales department regarding this product's availability.

Project name		Type		Quantity	
Date		Note			
LP4036.771-EN-SYM-3L-700-740-__-EN-C1-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM-3L] Symmetric, Special effect: 3 lines - 360x65°	[700] 38 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1]  Black
		[730] 3000 K CRI 70	[DALI] DALI	[HM2]  Dark grey
			[AUTO] AutoDIM	[HM3]  Anthracite grey
			[STEP] StepDIM	[HM4]  Light grey
				[HM5]  White
				[HM6]  Bronze
				[CC]  Custom colour (Please specify RAL code)
Extras				
Consult the factory				
[UNI] 120-277V 50/60Hz				