



# HELIOS 1 Module

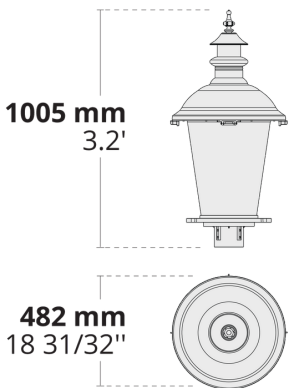

LP4036.771-US-SYM-3L-700-740

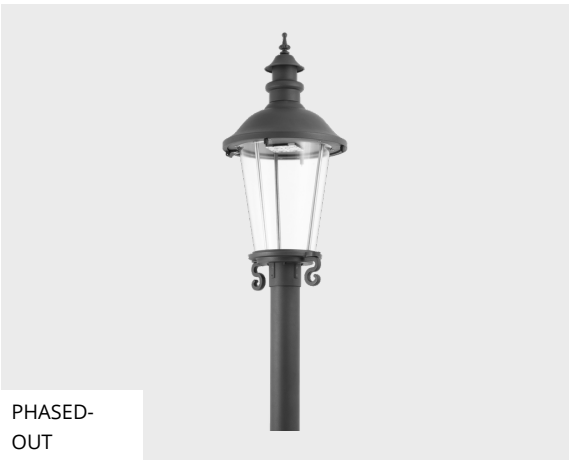

[SYM-3L]

Symmetric, Special  
effect: 3 lines

## Configuration








Light distribution	[SYM-3L] 360x65°
Delivered lumens flux	4200 lm
Rated input power	38 W
Color temperature	4000 K CRI 70
Luminaire efficacy	111 lm/W
Lamp	16 LED
Color Deviation	5 SDCM
BUG rating	B3-U0-G1
Lifetime L90 (hour)	>108,000
Lifetime L80 (hour)	>108,000

## Options

## Technical information

Mounting	Direct pole or side bracket mountable. Tenon: Ø2 1/4" x 4"
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK07
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.24 m <sup>2</sup>
Weight	4.86 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord
Notes	Please contact the sales department regarding this product's availability.

Project name					Type		Quantity	
Date			Note					
LP4036.771-US-SYM-3L-700-740-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SYM-3L]</b> Symmetric, Special effect: 3 lines - 360x65°	<b>[700]</b> 38 W	<b>[740]</b> 4000 K CRI 70	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black
		<b>[730]</b> 3000 K CRI 70	<b>[0-10V]</b> 0-10V	<b>[HM2]</b>  Dark gray  <b>[HM3]</b>  Anthracite gray  <b>[HM4]</b>  Light gray  <b>[HM5]</b>  White  <b>[HM6]</b>  Bronze  <b>[CC]</b>  Custom color (Please specify RAL code)