




HELIOS 1 Module



LP4036.771-US-SYM-3L-700-730

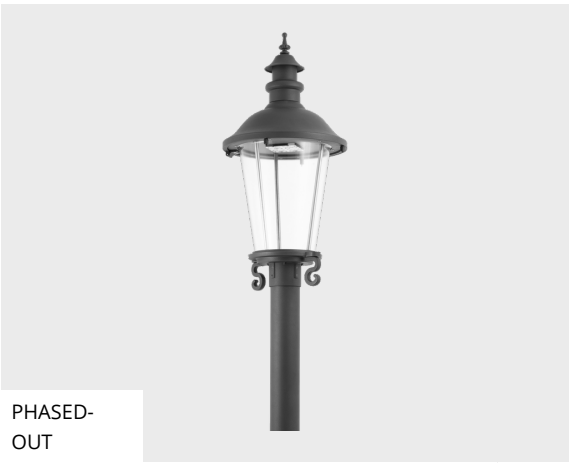

PHASED-
OUT

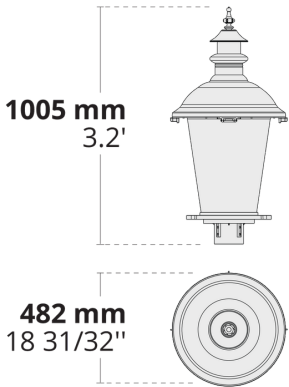

[SYM-3L]

Symmetric, Special
effect: 3 lines

Configuration








Light distribution	[SYM-3L] 360x65°
Delivered lumens flux	3990 lm
Rated input power	38 W
Color temperature	3000 K CRI 70
Luminaire efficacy	105 lm/W
Lamp	16 LED
Color Deviation	5 SDCM
BUG rating	B3-U0-G1
Lifetime L90 (hour)	>108,000
Lifetime L80 (hour)	>108,000

Options

Technical information

Mounting	Direct pole or side bracket mountable. Tenon: Ø2 1/4" x 4"
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK07
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.24 m ²
Weight	4.86 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord
Notes	Please contact the sales department regarding this product's availability.

Project name					Type		Quantity	
Date			Note					
LP4036.771-US-SYM-3L-700-730-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
[SYM-3L] Symmetric, Special effect: 3 lines - 360x65°	[700] 38 W	[730] 3000 K CRI 70	[ONOFF] On/Off	[HM1]  Black
		[740] 4000 K CRI 70	[0-10V] 0-10V	[HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)