



URBAN UNITS V3 Top Module, 180°, 4 Module

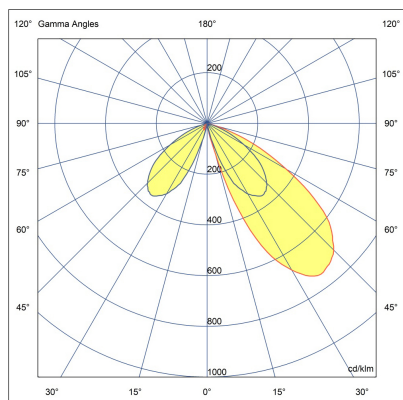

LP4054.847-EN-ASYM-700-830

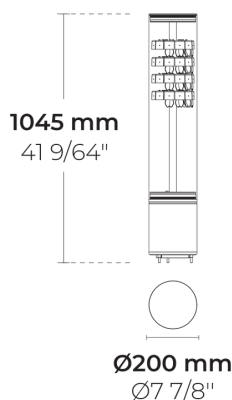

[ASYM]
Asymmetric

Configuration

Light distribution	[ASYM] 121x40°
Delivered lumens flux	4572 lm
Rated input power	52 W
Color temperature	3000 K CRI 80
Luminaire efficacy	87 lm/W
Lamp	24 LED
Color Deviation	3 SDCM
BUG rating	B1-U0-G1
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000

Options

Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	15.45 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	8" of flexible power cord

Poles (Included)

Product specific poles with base plate



Configuration code	Height	Diameter / Dimensions	Spigot / End diameter
PAFC.C01.T001-H3	10'	Ø 7 7/8"	
PAFC.C01.T001-H4	13.1'	Ø 7 7/8"	
PAFC.C01.T001-H5	16.4'	Ø 7 7/8"	

Project name				Type		Quantity	
Date		Note					
LP4054.847-EN-ASYM-700-830-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
[ASYM] Asymmetric - 121x40°	[700] 52 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1]  Black
		[827] 2700 K CRI 80	[DALI] DALI	[HM2]  Dark gray
		[740] 4000 K CRI 70		[HM3]  Anthracite gray
		[840] 4000 K CRI 80		[HM4]  Light gray
				[HM5]  White
				[HM6]  Bronze
				[CC]  Custom color (Please specify RAL code)
Extras				
Consult the factory				
[UNI] 120-277V 50/60Hz				
Luminaire body options				
[DPC] Double powder coating				