



URBAN UNITS V3 Top Module, 360°, 2 Module

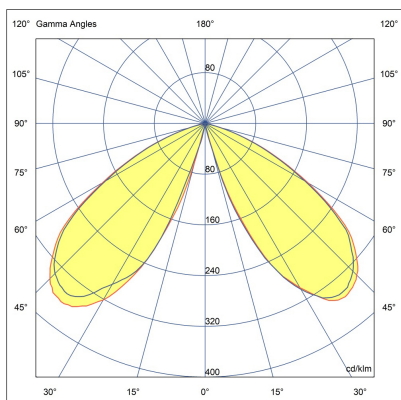

LP4054.844-US-SYM-700-830

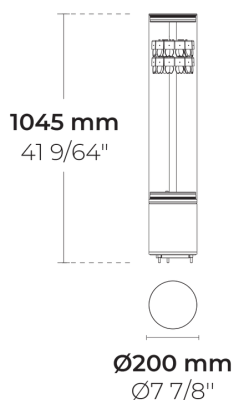

[SYM]
Symmetric

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [SYM] 118° |
| Delivered lumens flux | 4420 lm |
| Rated input power | 52 W |
| Color temperature | 3000 K CRI 80 |
| Luminaire efficacy | 85 lm/W |
| Lamp | 24 LED |
| Color Deviation | 3 SDCM |
| BUG rating | B2-U0-G1 |
| Lifetime L90 (hour) | >60,000 |
| Lifetime L80 (hour) | >60,000 |

Options

Technical information

| | |
|-------------------------|---|
| Housing | Corrosion resistant, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone |
| Lens / Reflector | High reflectance aluminium coating, multifaceted micro reflector |
| Glass / Diffusor | UV stable, bio-based polycarbonate diffusor |
| Impact protection | IK08 |
| Ingress protection | IP65 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 28.2 lbs |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 6/6 kV |
| Power factor | > 0.95 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 8" of flexible power cord |

Poles (Included)

Product specific poles with base plate



| Configuration code | Height | Diameter / Dimensions | Spigot / End diameter |
|--------------------|--------|--------------------------|--------------------------|
| PAFC.C01.T001-H3 | 10' | Ø 7 7/8" | |
| PAFC.C01.T001-H4 | 13.1' | Ø 7 7/8" | |
| PAFC.C01.T001-H5 | 16.4' | Ø 7 7/8" | |

| | | | | | | | |
|------------------------------------|--|------|--|------|--|----------|--|
| Project name | | | | Type | | Quantity | |
| Date | | Note | | | | | |
| LP4054.844-US-SYM-700-830-__-__-__ | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|---------------------------------------|----------------------|-------------------------------|--------------------------|---|
| [SYM] Symmetric - 118° | [700] 52 W | [830] 3000 K CRI 80 | [ONOFF] On/Off | [HM1] Black |
| | | [827] 2700 K CRI 80 | [0-10V] 0-10V | [HM2] Dark gray |
| | | [740] 4000 K CRI 70 | | [HM3] Anthracite gray |
| | | [840] 4000 K CRI 80 | | [HM4] Light gray |
| | | | | [HM5] White |
| | | | | [HM6] Bronze |
| | | | | [CC] Custom color (Please specify RAL code) |
| Extras | | | | |
| Luminaire body options | | | | |
| [DPC] Double powder coating | | | | |