



URBAN UNITS V3 Top Module, 360°, 2 Module

CE UK CA IK08 IP65

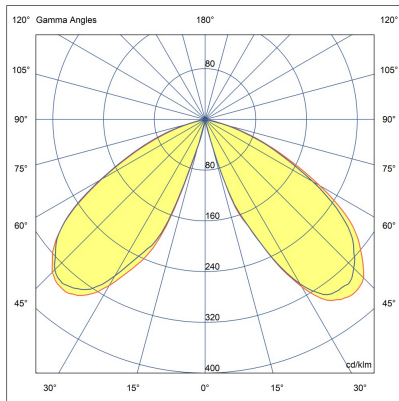

LP4054.844-EN-SYM-700-740-EN-C1

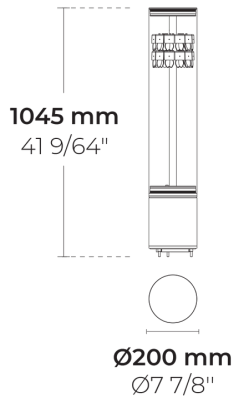

[SYM]
Symmetric

Variant

Light distribution	[SYM] 118°
Delivered lumens flux	4940 lm
Rated input power	52 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	90 lm/W
Lamp	24 LED
MacAdam Ellipse	3 SDCM
BUG rating	B2-U0-G1
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000

Options

Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	12.83 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.2 m of flexible cable

HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 07.05.2024.
For current version visit heperlighting.com. All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

Poles (Included)

Product specific poles with flange plate



Variant code	Height	Diameter / Dimensions	Spigot diameter
PAFC.C01.T001-H3	3m	Ø200mm	
PAFC.C01.T001-H4	4m	Ø200mm	
PAFC.C01.T001-H5	5m	Ø200mm	

Project name		Type		Quantity	
Date		Note			
LP4054.844-EN-SYM-700-740-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM] Symmetric - 118°	[700] 52 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black
		[827] 2700 K CRI 80	[DALI] DALI	[HM2] Dark grey
		[830] 3000 K CRI 80		[HM3] Anthracite grey
		[840] 4000 K CRI 80		[HM4] Light grey
				[HM5] White
				[HM6] Bronze
				[CC] Custom colour (Please specify RAL code)
Extras				
Consult the factory				
[UNI] 120-277V 50/60Hz				
Luminaire body options				
[DPC] Double powder coating				