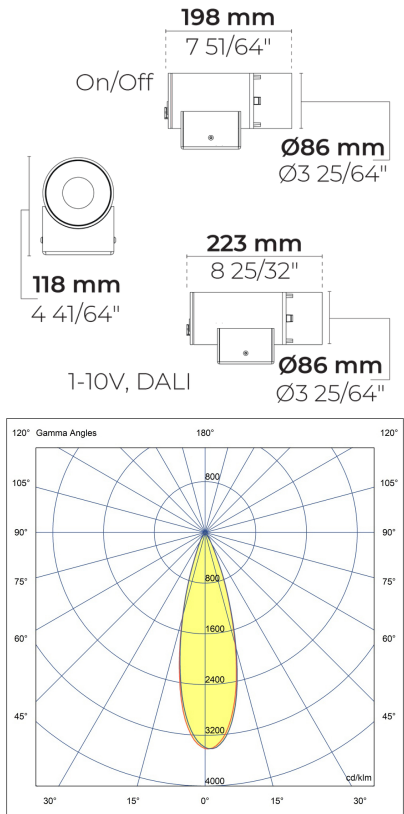


LF8017.693-EN-N-700-830



[N]

Narrow - NEMA Type 2

## Configuration

Light distribution	[N] 26°
Delivered lumens flux	849 lm
Rated input power	10 W
Color temperature	3000 K CRI 80
Luminaire efficacy	84 lm/W
Lamp	1 LED
Color Deviation	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600



## Options

## Technical information

Mounting	Yoke mount (standard), stake mount (optional)
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.02 m <sup>2</sup>
Weight	1.52 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.91
Through wiring	Single power cord entry
Operating temperature	-25...50°C
Power cord	16" of flexible power cord

# Accessories (To be ordered separately)

---

Mounting accessories	Optical accessories
	
<b>Spike</b>	<b>Visor for PUNTO S</b>
160405040	007502282

Project name				Type		Quantity	
Date		Note					

**LF8017.693-EN-N-700-830-**

Light distribution	Rated input power	Color temperature	Control	Product colors
<div>[N]</div> Narrow - NEMA Type 2 - 26°	<div>[700]</div> 10 W	<div>[830]</div> 3000 K CRI 80	<div>[ONOFF]</div> On/Off	<div>[HM1]</div> Black <div></div>
<div>[S]</div> Spot - NEMA Type 0 - 7°		<div>[827]</div> 2700 K CRI 80	<div>[DALI]</div> DALI	<div>[HM2]</div> Dark gray <div></div>
<div>[MN]</div> Medium narrow - NEMA Type 3 - 42°		<div>[740]</div> 4000 K CRI 70		<div>[HM3]</div> Anthracite gray <div></div>
<div>[M]</div> Medium - NEMA Type 4 - 60°		<div>[840]</div> 4000 K CRI 80		<div>[HM4]</div> Light gray <div></div>
				<div>[HM5]</div> White <div></div>
				<div>[HM6]</div> Bronze <div></div>
				<div>[CC]</div> Custom color (Please specify RAL code) <div></div>
Extras	Accessories ( <i>To be ordered separately</i> )			
Consult the factory	Mounting accessories			
<div>[UNI]</div> 120-277V 50/60Hz	<div>[160405040]</div> Spike			
Luminaire body options	Optical accessories			
<div>[DPC]</div> Double powder coating	<div>[007502282]</div> Visor for PUNTO S			