


PUNTO S



LF8017.693-EN-N-700-830

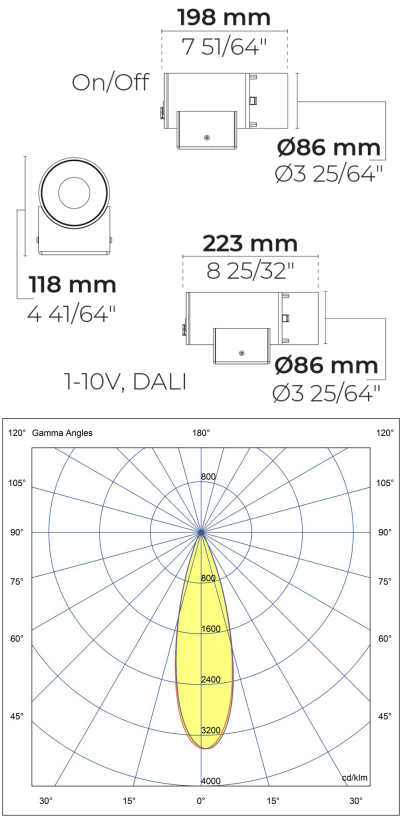

[N]

Narrow - NEMA Type 2

Configuration


Light distribution	[N] 26°
Delivered lumens flux	849 lm
Rated input power	10 W
Color temperature	3000 K CRI 80
Luminaire efficacy	84 lm/W
Lamp	1 LED
Color Deviation	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

Options

Technical information

Mounting	Yoke mount (standard), stake mount (optional)
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.02 m ²
Weight	1.52 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.91
Through wiring	Single power cord entry
Operating temperature	-25...50°C
Power cord	16" of flexible power cord

Accessories (To be ordered separately)

Mounting accessories	Optical accessories
	
Spike	Visor for PUNTO S
160405040	007502282

Project name				Type		Quantity	
Date		Note					
LF8017.693-EN-N-700-830-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
[N] Narrow - NEMA Type 2 - 26°	[700] 10 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black
[S] Spot - NEMA Type 0 - 7°		[827] 2700 K CRI 80	[DALI] DALI	[HM2] Dark gray
[MN] Medium narrow - NEMA Type 3 - 42°		[740] 4000 K CRI 70		[HM3] Anthracite gray
[M] Medium - NEMA Type 4 - 60°		[840] 4000 K CRI 80		[HM4] Light gray
				[HM5] White
				[HM6] Bronze
				[CC] Custom color (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Mounting accessories			
[UNI] 120-277V 50/60Hz	[160405040] Spike			
Luminaire body options	Optical accessories			
[DPC] Double powder coating	[007502282] Visor for PUNTO S			