



PUNTO S Ex

CE UK CA IK08 IP65

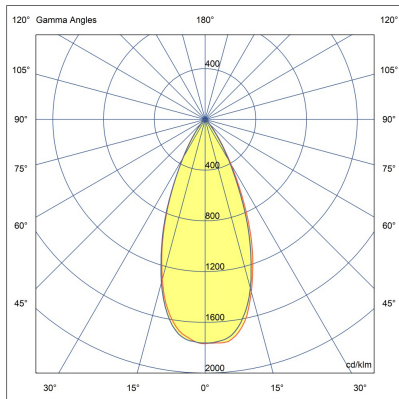

LF8030.693-EN-MN-700-830-EN-C1

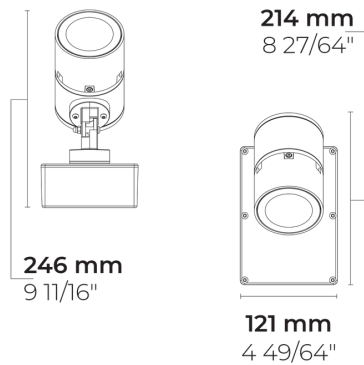

[MN]

Medium narrow

Variant

Light distribution	[MN] 42°
Delivered lumens flux	697 lm
Rated input power	10 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	69 lm/W
Lamp	1 LED
MacAdam Ellipse	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

Options

Technical information

Mounting	Surface mountable via a stationery base
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	1.57 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.91
Through wiring	Single cable entry
Cable	0.4 m of flexible cable

HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 18.05.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Optical accessories



Visor for PUNTO S

007502282

Project name		Type		Quantity	
Date		Note			
LF8030.693-EN-MN-700-830-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[MN] Medium narrow - 42°	[700] 10 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black
[S] Spot - 7°		[827] 2700 K CRI 80	[DALI] DALI	[HM2] Dark grey
[N] Narrow - 26°		[740] 4000 K CRI 70		[HM3] Anthracite grey
[M] Medium - 60°		[840] 4000 K CRI 80		[HM4] Light grey
				[HM5] White
				[HM6] Bronze
				[CC] Custom colour (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Optical accessories			
[UNI] 120-277V 50/60Hz	[007502282] Visor for PUNTO S			
Luminaire body options				
[DPC] Double powder coating				