



# PUNTO S W

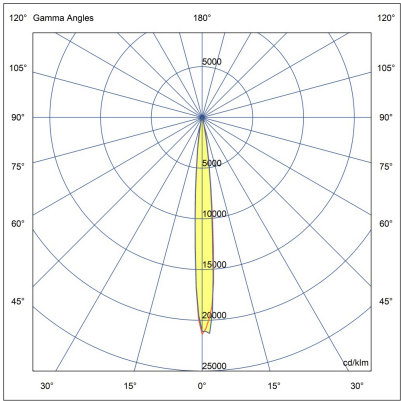

LW8017.693-EN-S-700-827



[S]

Spot - NEMA Type 0

## Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [S] 7°        |
| Delivered lumens flux | 837 lm        |
| Rated input power     | 10 W          |
| Color temperature     | 2700 K CRI 80 |
| Luminaire efficacy    | 82 lm/W       |
| Lamp                  | 1 LED         |
| Color Deviation       | 5 SDCM        |
| BUG rating            | B1-U0-G0      |
| Lifetime L90 (hour)   | >72,600       |
| Lifetime L80 (hour)   | >72,600       |

## Options

## Technical information

|                         |                                                                                             |
|-------------------------|---------------------------------------------------------------------------------------------|
| Mounting                | Wall mountable                                                                              |
| Housing                 | Corrosion resistant, marine grade aluminum housing                                          |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating                   |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                                |
| Gasket                  | Silicone rubber                                                                             |
| Lens / Reflector        | High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M] |
| Glass / Diffuser        | Tempered safety glass                                                                       |
| Impact protection       | IK08                                                                                        |
| Ingress protection      | IP65                                                                                        |
| Input voltage           | 220-240V 50/60Hz                                                                            |
| Insulation class        | Class I                                                                                     |
| Weight                  | 1.27 kg                                                                                     |
| LED module              | Multi-chip high power LEDs on metal-core PCB                                                |
| Driver                  | Internal LED driver                                                                         |
| Driver surge protection | 1/1 kV                                                                                      |
| Power factor            | > 0.91                                                                                      |
| Through wiring          | Single power cord entry                                                                     |
| Operating temperature   | -25...50°C                                                                                  |
| Power cord              | 8" of flexible power cord                                                                   |

## Accessories (To be ordered separately)

---

### Optical accessories



#### Visor for PUNTO S

007502282

|                                  |  |  |      |  |      |  |          |  |
|----------------------------------|--|--|------|--|------|--|----------|--|
| Project name                     |  |  |      |  | Type |  | Quantity |  |
| Date                             |  |  | Note |  |      |  |          |  |
| LW8017.693-EN-S-700-827-__-__-__ |  |  |      |  |      |  |          |  |

| Light distribution                                                                                                                                                                            | Rated input power                               | Color temperature                                                                                                                            | Control                                               | Product colors                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[S]</b><br>Spot - NEMA Type 0 - 7°<br><br><b>[N]</b><br>Narrow - NEMA Type 2 - 26°<br><br><b>[MN]</b><br>Medium narrow - NEMA Type 3 - 42°<br><br><b>[M]</b><br>Medium - NEMA Type 4 - 60° | <b>[700]</b><br>10 W                            | <b>[827]</b><br>2700 K CRI 80<br><br><b>[830]</b><br>3000 K CRI 80<br><br><b>[740]</b><br>4000 K CRI 70<br><br><b>[840]</b><br>4000 K CRI 80 | <b>[ONOFF]</b><br>On/Off<br><br><b>[DALI]</b><br>DALI | <b>[HM1]</b> <br>Black<br><br><b>[HM2]</b> <br>Dark gray<br><br><b>[HM3]</b> <br>Anthracite gray<br><br><b>[HM4]</b> <br>Light gray<br><br><b>[HM5]</b> <br>White<br><br><b>[HM6]</b> <br>Bronze<br><br><b>[CC]</b> <br>Custom color (Please specify RAL code) |
| Extras                                                                                                                                                                                        | Accessories ( <i>To be ordered separately</i> ) |                                                                                                                                              |                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Consult the factory                                                                                                                                                                           | Optical accessories                             |                                                                                                                                              |                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>[UNI]</b><br>120-277V 50/60Hz                                                                                                                                                              | <b>[007502282]</b><br>Visor for PUNTO S         |                                                                                                                                              |                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |