


# PUNTO S W Duo

CE UK CA IK08 IP65



LW7036.519-EN-N-N-700-830-EN-C1

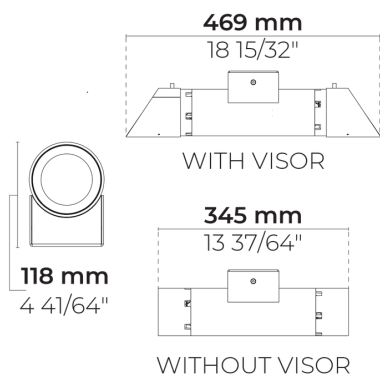

[N-N]  
Narrow (Up & Down)

## Variant

|                        |               |
|------------------------|---------------|
| Light distribution     | [N-N] 26°     |
| Delivered lumens flux  | 1698 lm       |
| Rated input power      | 18 W          |
| Colour temperature     | 3000 K CRI 80 |
| Luminaire efficacy     | 84 lm/W       |
| Lamp                   | 2 LED         |
| MacAdam Ellipse        | 5 SDCM        |
| BUG rating             | B1-U0-G0      |
| Lifetime L90B50 (hour) | >72,600       |
| Lifetime L80B50 (hour) | >72,600       |

## Options

## Technical information

|                         |                                                                                             |
|-------------------------|---------------------------------------------------------------------------------------------|
| Mounting                | Wall mountable                                                                              |
| Housing                 | Corrosion resistant, marine grade aluminum housing                                          |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating                   |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                                |
| Gasket                  | Silicone rubber                                                                             |
| Lens / Reflector        | High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M] |
| Glass / Diffuser        | Tempered safety glass                                                                       |
| Impact protection       | IK08                                                                                        |
| Ingress protection      | IP65                                                                                        |
| Input voltage           | 220-240V 50/60Hz                                                                            |
| Insulation class        | Class I                                                                                     |
| Weight                  | 1.51 kg                                                                                     |
| LED module              | Multi-chip high power LEDs on metal-core PCB                                                |
| Driver                  | Internal LED driver                                                                         |
| Driver surge protection | 2/2 kV                                                                                      |
| Power factor            | > 0.90                                                                                      |
| Through wiring          | Single cable entry                                                                          |
| Operating temperature   | -40...50°C                                                                                  |
| Cable                   | 0.2 m of flexible cable                                                                     |
| Notes                   | Please consult factory for combinations of different light distributions.                   |

## Accessories (To be ordered separately)

---

### Optical accessories



#### Visor for PUNTO S

007502282

|                                          |  |      |  |          |  |
|------------------------------------------|--|------|--|----------|--|
| Project name                             |  | Type |  | Quantity |  |
| Date                                     |  | Note |  |          |  |
| LW7036.519-EN-N-N-700-830-__-EN-C1-__-__ |  |      |  |          |  |

| Light distribution                                                                                                                                                                             | Rated input power                               | Colour temperature                                                                                                                           | Control                                               | Product colours                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[N-N]</b><br>Narrow (Up & Down) - 26°<br><br><b>[S-S]</b><br>Spot (Up & Down) - 7°<br><br><b>[MN-MN]</b><br>Medium Narrow (Up & Down) - 42°<br><br><b>[M-M]</b><br>Medium (Up & Down) - 60° | <b>[700]</b><br>18 W                            | <b>[830]</b><br>3000 K CRI 80<br><br><b>[827]</b><br>2700 K CRI 80<br><br><b>[740]</b><br>4000 K CRI 70<br><br><b>[840]</b><br>4000 K CRI 80 | <b>[ONOFF]</b><br>On/Off<br><br><b>[DALI]</b><br>DALI | <b>[HM1]</b> <br>Black<br><br><b>[HM2]</b> <br>Dark grey<br><br><b>[HM3]</b> <br>Anthracite grey<br><br><b>[HM4]</b> <br>Light grey<br><br><b>[HM5]</b> <br>White<br><br><b>[HM6]</b> <br>Bronze<br><br><b>[CC]</b> <br>Custom colour (Please specify RAL code) |
| Extras                                                                                                                                                                                         | Accessories ( <i>To be ordered separately</i> ) |                                                                                                                                              |                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Consult the factory                                                                                                                                                                            | Optical accessories                             |                                                                                                                                              |                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>[UNI]</b><br>120-277V 50/60Hz                                                                                                                                                               | <b>[007502282]</b><br>Visor for PUNTO S         |                                                                                                                                              |                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |