


## PUNTO S



LF8017.693-US-MN-700-840

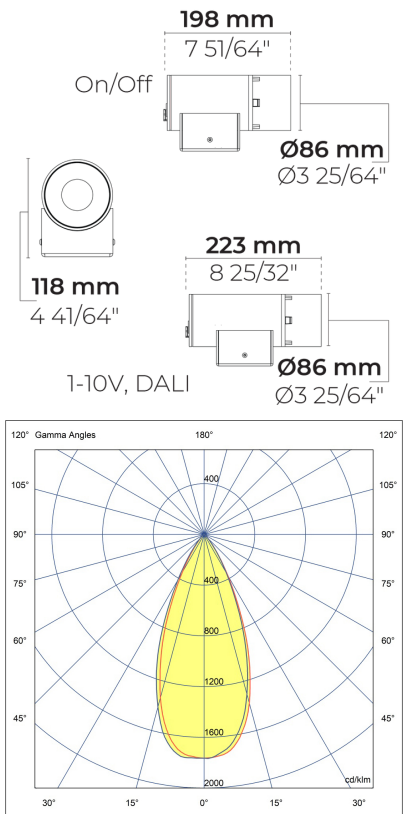

[MN]

Medium narrow -  
NEMA Type 3

## Configuration

<b>Light distribution</b>	[MN] 42°
<b>Delivered lumens flux</b>	782 lm
<b>Rated input power</b>	10 W
<b>Color temperature</b>	4000 K CRI 80
<b>Luminaire efficacy</b>	78 lm/W
<b>Lamp</b>	1 LED
<b>Color Deviation</b>	5 SDCM
<b>Lifetime L90 (hour)</b>	>72,600
<b>Lifetime L80 (hour)</b>	>72,600

## Options

## Technical information

<b>Mounting</b>	Yoke mount (standard), stake mount (optional)
<b>Tilt angle</b>	+60°/-30°
<b>Housing</b>	Corrosion resistant, die-cast, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone rubber
<b>Lens / Reflector</b>	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP65
<b>Input voltage</b>	120-277V 50/60Hz
<b>Insulation class</b>	Class I
<b>Wind catching area (EPA)</b>	0.23 ft²
<b>Weight</b>	3.3 lbs
<b>LED module</b>	Multi-chip high power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	1/1 kV
<b>Power factor</b>	> 0.90
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-30...50°C
<b>Power cord</b>	16" of flexible power cord

# Accessories (To be ordered separately)

---

Optical accessories



**Visor for PUNTO S**

007502282

Mounting accessories



**Spike**

160405040

Project name				Type		Quantity	
Date		Note					

**LF8017.693-US-MN-700-840-\_\_-\_\_-\_\_**

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[MN]</b> Medium narrow - NEMA Type 3 - 42°	<b>[700]</b> 10 W	<b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black
<b>[S]</b> Spot - NEMA Type 0 - 7°		<b>[827]</b> 2700 K CRI 80	<b>[0-10V]</b> 0-10V	<b>[HM2]</b> Dark gray
<b>[N]</b> Narrow - NEMA Type 2 - 26°		<b>[730]</b> 3000 K CRI 70		<b>[HM3]</b> Anthracite gray
<b>[M]</b> Medium - NEMA Type 4 - 60°		<b>[830]</b> 3000 K CRI 80		<b>[HM4]</b> Light gray
		<b>[740]</b> 4000 K CRI 70		<b>[HM5]</b> White
				<b>[HM6]</b> Bronze
				<b>[CC]</b> Custom color (Please specify RAL code)
Extras	Accessories ( <i>To be ordered separately</i> )			
Luminaire body options	Optical accessories			
[DPC] Double powder coating	[007502282] Visor for PUNTO S			
	Mounting accessories			
	[160405040] Spike			