


PUNTO S



LF8017.693-US-N-700-840

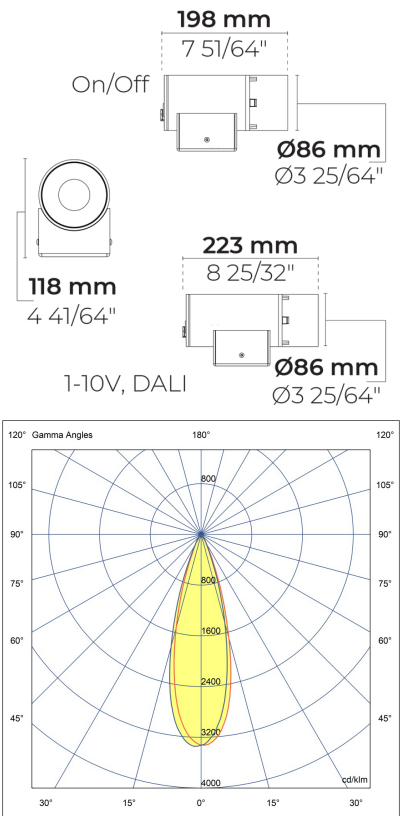

[N]

Narrow - NEMA Type 2

Configuration

Light distribution	[N] 26°
Delivered lumens flux	953 lm
Rated input power	10 W
Color temperature	4000 K CRI 80
Luminaire efficacy	91 lm/W
Lamp	1 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

Options

Technical information

Mounting	Yoke mount (standard), stake mount (optional)
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.23 ft²
Weight	3.3 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-30...50°C
Power cord	16" of flexible power cord

Accessories (To be ordered separately)


Optical accessories



Visor for PUNTO S

007502282

Mounting accessories



Spike

160405040

Project name				Type		Quantity	
Date		Note					

LF8017.693-US-N-700-840-

Light distribution	Rated input power	Color temperature	Control	Product colors
[N] Narrow - NEMA Type 2 - 26° [S] Spot - NEMA Type 0 - 7° [MN] Medium narrow - NEMA Type 3 - 42° [M] Medium - NEMA Type 4 - 60°	[700] 10 W	[840] 4000 K CRI 80 [827] 2700 K CRI 80 [830] 3000 K CRI 80	[ONOFF] On/Off [0-10V] 0-10V	[HM1] Black [HM2] Dark gray [HM3] Anthracite gray [HM4] Light gray [HM5] White [HM6] Bronze [CC] Custom color (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Luminaire body options	Optical accessories			
	[007502282] Visor for PUNTO S			
	Mounting accessories			
[DPC] Double powder coating	[160405040] Spike			