

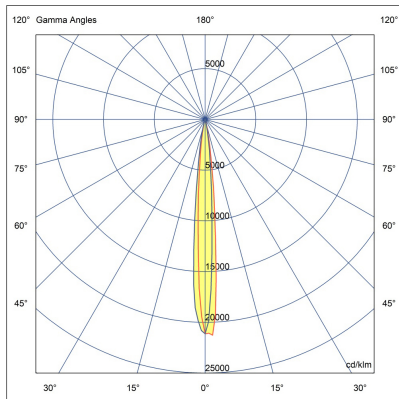


PUNTO S W Duo

IK08 IP65

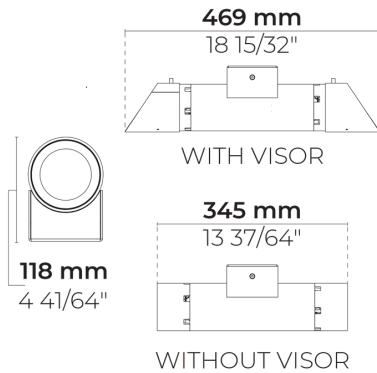

LW7036.519-US-S-S-700-740-UNI-C1

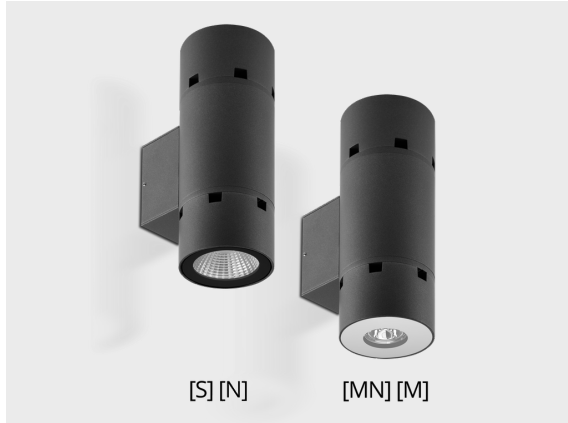

[S-S]

Spot (Up & Down)

Variant

| | |
|------------------------|---------------|
| Light distribution | [S-S] 7° |
| Delivered lumens flux | 2038 lm |
| Rated input power | 18 W |
| Colour temperature | 4000 K CRI 70 |
| Luminaire efficacy | 113 lm/W |
| Lamp | 2 LED |
| MacAdam Ellipse | 5 SDCM |
| BUG rating | B1-U1-G0 |
| Lifetime L90B50 (hour) | >72,600 |
| Lifetime L80B50 (hour) | >72,600 |

Options

Technical information

| | |
|-------------------------|---|
| Mounting | Wall mountable |
| Housing | Corrosion resistant, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone rubber |
| Lens / Reflector | High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M] |
| Glass / Diffuser | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP65 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 3.3 lbs |
| LED module | Multi-chip high power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 2/2 kV |
| Power factor | > 0.90 |
| Through wiring | Single cable entry |
| Operating temperature | -40...50°C |
| Cable | 0.2 m of flexible cable |
| Notes | Please consult factory for combinations of different light distributions. |

Accessories (To be ordered separately)








Optical accessories



Visor for PUNTO S

007502282

| | | | | | |
|--|--|------|--|----------|--|
| Project name | | Type | | Quantity | |
| Date | | Note | | | |
| LW7036.519-US-S-S-700-740-__-UNI-C1-__ | | | | | |

| Light distribution | Rated input power | Colour temperature | Control | Product colours |
|---|----------------------|-------------------------------|--------------------------|--|
| [S-S] Spot (Up & Down) - 7° | [700] 18 W | [740] 4000 K CRI 70 | [ONOFF] On/Off | [HM1] Black  |
| [N-N] Narrow (Up & Down) - 26° | | [827] 2700 K CRI 80 | [0-10V] 0-10V | [HM2] Dark grey  |
| [MN-MN] Medium Narrow (Up & Down) - 42° | | [830] 3000 K CRI 80 | | [HM3] Anthracite grey  |
| [M-M] Medium (Up & Down) - 60° | | [840] 4000 K CRI 80 | | [HM4] Light grey  |
| | | | | [HM5] White  |
| | | | | [HM6] Bronze  |
| | | | | [CC]  Custom colour (Please specify RAL code) |
| Accessories (To be ordered separately) | | | | |
| Optical accessories | | | | |
| [007502282] Visor for PUNTO S | | | | |