

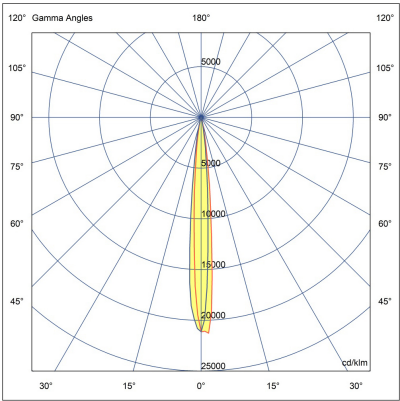


# PUNTO S W Duo

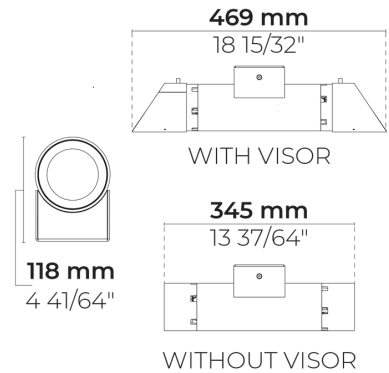

LW7036.519-US-S-S-700-840

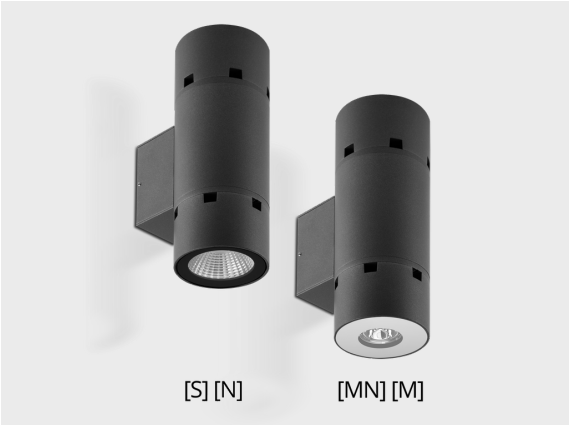

[S-S]  
Spot - NEMA Type 0  
(Up & Down)

HEPER USA LLC  
W227 N546 Westmound Drive Waukesha, 53186  
Wisconsin, United States  
+1 312 910 9740  
infoUS@hepergroup.com

## Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [S-S] 7°      |
| Delivered lumens flux | 1906 lm       |
| Rated input power     | 18 W          |
| Color temperature     | 4000 K CRI 80 |
| Luminaire efficacy    | 105 lm/W      |
| Lamp                  | 2 LED         |
| Color Deviation       | 5 SDCM        |
| BUG rating            | B1-U0-G0      |
| Lifetime L90 (hour)   | >72,600       |
| Lifetime L80 (hour)   | >72,600       |

## Options

## Technical information

|                         |                                                                                             |
|-------------------------|---------------------------------------------------------------------------------------------|
| Mounting                | Wall mountable                                                                              |
| Housing                 | Corrosion resistant, marine grade aluminum housing                                          |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating                   |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                                |
| Gasket                  | Silicone rubber                                                                             |
| Lens / Reflector        | High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M] |
| Glass / Diffusor        | Tempered safety glass                                                                       |
| Impact protection       | IK08                                                                                        |
| Ingress protection      | IP65                                                                                        |
| Input voltage           | 120-277V 50/60Hz                                                                            |
| Insulation class        | Class I                                                                                     |
| Weight                  | 3.3 lbs                                                                                     |
| LED module              | Multi-chip high power LEDs on metal-core PCB                                                |
| Driver                  | Internal LED driver                                                                         |
| Driver surge protection | 2/2 kV                                                                                      |
| Power factor            | > 0.90                                                                                      |
| Through wiring          | Single power cord entry                                                                     |
| Operating temperature   | -40...50°C                                                                                  |
| Power cord              | 8" of flexible power cord                                                                   |
| Notes                   | Please consult factory for combinations of different beam spreads.                          |

We reserve the right to change specifications without prior written notice. Edition: 18.05.2024. For current version visit [heperlighting.com](http://heperlighting.com). All flux ( $\pm 7\%$  tolerance) and power values ( $\pm 10\%$  tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

---

### Optical accessories



#### Visor for PUNTO S

007502282

|                                   |  |      |  |  |      |  |          |  |
|-----------------------------------|--|------|--|--|------|--|----------|--|
| Project name                      |  |      |  |  | Type |  | Quantity |  |
| Date                              |  | Note |  |  |      |  |          |  |
| LW7036.519-US-S-S-700-840-__ - __ |  |      |  |  |      |  |          |  |

| Light distribution                                        | Rated input power    | Color temperature             | Control                  | Product colors                                                                                                                            |
|-----------------------------------------------------------|----------------------|-------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[S-S]</b><br>Spot - NEMA Type 0<br>(Up & Down) - 7°    | <b>[700]</b><br>18 W | <b>[840]</b><br>4000 K CRI 80 | <b>[ONOFF]</b><br>On/Off | <b>[HM1]</b> <br>Black                                 |
| <b>[N-N]</b><br>Narrow - NEMA Type 2<br>(Up & Down) - 26° |                      | <b>[827]</b><br>2700 K CRI 80 | <b>[0-10V]</b><br>0-10V  | <b>[HM2]</b> <br>Dark gray                             |
| <b>[MN-MN]</b><br>Medium Narrow (Up & Down) - 42°         |                      | <b>[830]</b><br>3000 K CRI 80 |                          | <b>[HM3]</b> <br>Anthracite gray                       |
| <b>[M-M]</b><br>Medium (Up & Down) - 60°                  |                      | <b>[740]</b><br>4000 K CRI 70 |                          | <b>[HM4]</b> <br>Light gray                            |
|                                                           |                      |                               |                          | <b>[HM5]</b> <br>White                                 |
|                                                           |                      |                               |                          | <b>[HM6]</b> <br>Bronze                                |
|                                                           |                      |                               |                          | <b>[CC]</b> <br>Custom color (Please specify RAL code) |
| <b>Accessories (To be ordered separately)</b>             |                      |                               |                          |                                                                                                                                           |
| <b>Optical accessories</b>                                |                      |                               |                          |                                                                                                                                           |
| <b>[007502282]</b><br>Visor for PUNTO S                   |                      |                               |                          |                                                                                                                                           |