

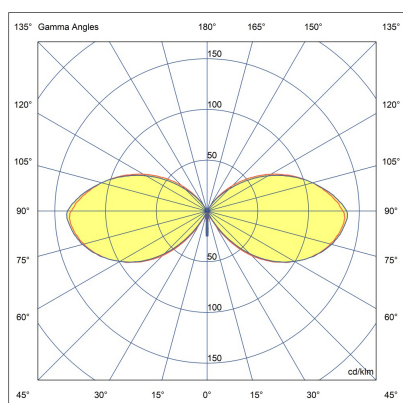


LB6062.693-US-SYM-4L-700-827-ONOFF-HC

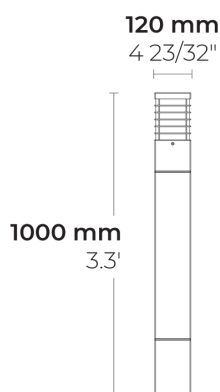

[SYM-4L]

Symmetric, Special  
effect: 4 lines

## Configuration

Light distribution	[SYM-4L] 240°
Delivered lumens flux	109 lm
Rated input power	10 W
Color temperature	2700 K CRI 80
Luminaire efficacy	10 lm/W
Lamp	1 LED
Color Deviation	3 SDCM
BUG rating	B0-U2-G0
ULOR	27.8
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000


## Options

## Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, marine grade aluminium head combined with special wood body
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	12.5 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-30...50°C
Power cord	20" of outdoor use rated flexible power cord

# Accessories (To be ordered separately)








## Anchor bolts



90AJ001

90AJ001

Project name					Type		Quantity	
Date			Note					
LB6062.693-US-SYM-4L-700-827-ONOFF-__-HC-__								

Light distribution	Rated input power	Color temperature	Control	Product colors	
<b>[SYM-4L]</b> Symmetric, Special effect: 4 lines - 240°	<b>[700]</b> 10 W	<b>[827]</b> 2700 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black	
		<b>[830]</b> 3000 K CRI 80		<b>[HM2]</b> Dark gray	
		<b>[740]</b> 4000 K CRI 70		<b>[HM3]</b> Anthracite gray	
		<b>[840]</b> 4000 K CRI 80		<b>[HM4]</b> Light gray	
				<b>[HM5]</b> White	
				<b>[HM6]</b> Bronze	
				<b>[CC]</b> Custom color (Please specify RAL code)	
Height	Extras	Accessories ( <i>To be ordered separately</i> )			
<b>[HC]</b>	Luminaire body options	Anchor bolts			
	<b>[DPC]</b> Double powder coating	<b>[90AJ001]</b> 90AJ001			