
د) IK07 IP65 🗐



## LF8021.695-US-N-700-830-UNI-C1



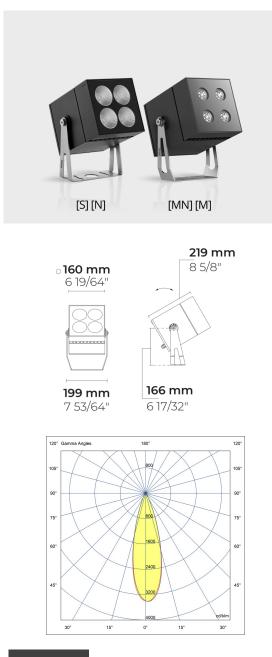

Narrow

#### Variant

Light distribution	[N] 26°
Delivered lumens flux	3397 lm
Rated input power	35 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	84 lm/W
Lamp	4 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

### Options

### Technical information

Mounting	Surface mountable via a bracket (standard) or
	spike (optional)
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade
	aluminum housing
Finishing	Chromate conversion pretreatment followed by
	electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N],
	PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area	0.40 ft <sup>2</sup>
(EPA)	
Weight	14.3 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	10/6 kV
protection	
Power factor	> 0.95
Through wiring	Single cable entry
Operating	-4050°C
temperature	
Cable	0.4 m of flexible cable

### HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

#### HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 07.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

# Accessories (To be ordered separately)



Visor for VEGA 100708017

**Spike** 160405040

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

#### HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 07.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project na	me			Туре	Quantity		
Date			Note				
LF8021.695-US-N-700-830UNI-C1							

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[N]</b> Narrow - 26°	<b>[700]</b> 35 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	[HM1] Black
<b>[S]</b> Spot - 7°		<b>[827]</b> 2700 K CRI 80	<b>[0-10V]</b> 0-10V	[HM2] Dark grey
<b>[MN]</b> Medium narrow - 42°		<b>[740]</b> 4000 K CRI 70		[HM3] Anthracite grey
<b>[M]</b> Medium - 60°		<b>[840]</b> 4000 K CRI 80		[HM4] Light grey
				[HM5] White
				[HM6] Bronze
				[CC] (Custom colour (Pleas specify RAL code)
Extras	Accessories (To be ordered separately)			
Luminaire body options	Optical accessories			
[DPC] Double powder coating	[ <b>100708017]</b> Visor for VEGA			
	Mounting accessories	_		
	<b>[160405040]</b> Spike			

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

#### HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 07.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.