



# PUNTO S C

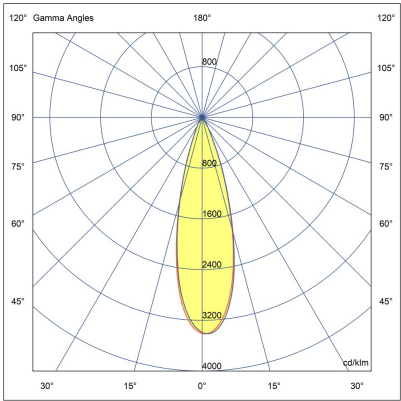

LD8017.693-EN-N-700-740-ONOFF

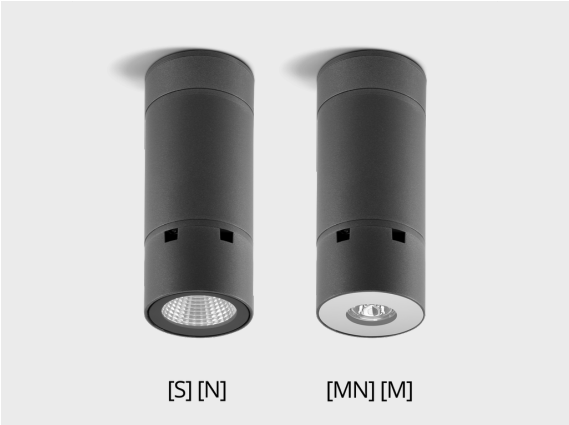

[N]

Narrow - NEMA Type 2

## Configuration

Light distribution	[N] 26°
Delivered lumens flux	1019 lm
Rated input power	10 W
Color temperature	4000 K CRI 70
Luminaire efficacy	101 lm/W
Lamp	1 LED
Color Deviation	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

## Options

## Technical information

Mounting	Ceiling mountable
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	1.16 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.91
Through wiring	Single power cord entry
Operating temperature	-25...50°C
Power cord	8" of flexible power cord

## Accessories (To be ordered separately)

---








### Optical accessories



#### Visor for PUNTO S

007502282

Project name					Type		Quantity	
Date			Note					
LD8017.693-EN-N-700-740-ONOFF-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[N]</b> Narrow - NEMA Type 2 - 26°  <b>[S]</b> Spot - NEMA Type 0 - 7°  <b>[MN]</b> Medium narrow - NEMA Type 3 - 42°  <b>[M]</b> Medium - NEMA Type 4 - 60°	<b>[700]</b> 10 W	<b>[740]</b> 4000 K CRI 70  <b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black  <b>[HM2]</b>  Dark gray  <b>[HM3]</b>  Anthracite gray  <b>[HM4]</b>  Light gray  <b>[HM5]</b>  White  <b>[HM6]</b>  Bronze  <b>[CC]</b>  Custom color (Please specify RAL code)
Extras	Accessories ( <i>To be ordered separately</i> )			
Consult the factory	Optical accessories			
<b>[UNI]</b> 120-277V 50/60Hz	<b>[007502282]</b> Visor for PUNTO S			