
# **VEGA S**

# € 🖁 кот ір65 🚊



## LF8020.693-EN-N-700-830-EN-C1



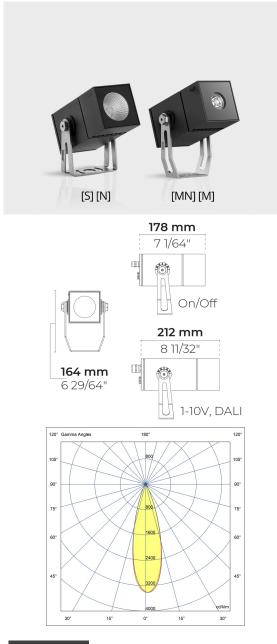

Narrow

### Variant

Light distribution	[N] 26°
Delivered lumens flux	849 lm
Rated input power	10 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	84 lm/W
Lamp	1 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

### Options

Cable

## Technical information

Mounting	Surface mountable via a bracket (standard) or
	spike (optional)
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade
	aluminum housing
Finishing	Chromate conversion pretreatment followed by
	electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N],
	PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.07 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	1/1 kV
protection	
Power factor	> 0.91
Through wiring	Single cable entry
Operating	-2550°C
temperature	

0.5 m of flexible cable

#### HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

#### HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 07.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

# Accessories (To be ordered separately)

Optical accessories	Mounting accessories
Visor for VEGA S	Spike
100708016	160405040

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

#### HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 07.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project na	me				Туре	Quantity	
Date			Note				
LF8020.	593-EN-N	-700-830	EN-C	1			

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[N]</b> Narrow - 26°	<b>[700]</b> 10 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	[HM1] Black
<b>[S]</b> Spot - 7°		<b>[827]</b> 2700 K CRI 80	<b>[DALI]</b> DALI	[HM2] Dark grey
<b>[MN]</b> Medium narrow - 42°		<b>[740]</b> 4000 K CRI 70		[HM3] Anthracite grey
<b>[M]</b> Medium - 60°		<b>[840]</b> 4000 K CRI 80		[HM4] Light grey
				[HM5] White
				[HM6] Bronze
				[CC] (Custom colour (Please specify RAL code)
Extras	Accessories ( <i>To be</i> ordered separately)			
Consult the factory	Optical accessories	_		
<b>[UNI]</b> 120-277V 50/60Hz	<b>[100708016]</b> Visor for VEGA S			
Luminaire body options	Mounting accessories			
<b>[DPC]</b> Double powder coating	<b>[160405040]</b> Spike			

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

#### HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 07.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.