



# LF8020.693-EN-N-700-830

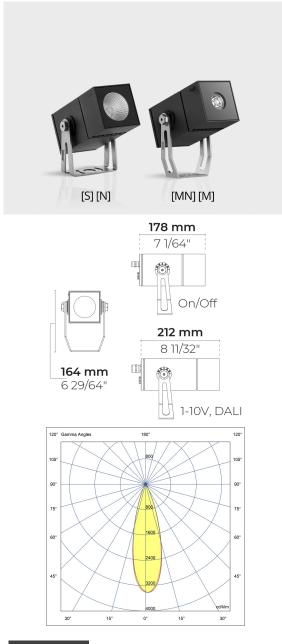



### Configuration

Light distribution	[N] 26°
Delivered lumens flux	849 lm
Rated input power	10 W
Color temperature	3000 K CRI 80
Luminaire efficacy	84 lm/W
Lamp	1 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

#### Options

## Technical information

Mounting	Yoke mount (standard), stake mount (optional)
Tilt angle	+60°/-30°
0	
Housing	Corrosion resistant, die-cast, marine grade
Finishin a	aluminum housing
Finishing	Chromate conversion pretreatment followed by
<b>-</b>	electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N],
	PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.07 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	1/1 kV
protection	
Power factor	> 0.91
Through wiring	Single power cord entry
Operating	-2550°C
temperature	
Power cord	20" of outdoor use rated flexible power cord

# Accessories (To be ordered separately)

Optical accessories	Mounting accessories	
Visor for VEGA S	Spike	
100708016	160405040	

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com

Project na	me			Туре	Quantity		
Date		Note					
LF8020.	693-EN-N	-700-830					

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[N]</b> Narrow - NEMA Type 2 - 26°	<b>[700]</b> 10 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	[HM1] Black
<b>[S]</b> Spot - NEMA Type 0 - 7°		[827] 2700 K CRI 80 [740]	<b>[DALI]</b> DALI	[HM2] Dark gray [HM3]
[MN] Medium narrow -		4000 K CRI 70 [ <b>840]</b> 4000 K CRI 80		Anthracite gray
NEMA Type 3 - 42° [ <b>M</b> ]				Light gray
Medium - NEMA Type 4 - 60°				[HM5] White
				[HM6] Bronze
				[CC] (Please Specify RAL code)
Extras	Accessories (To be ordered separately)			
Consult the factory	Optical accessories			
<b>[UNI]</b> 120-277V 50/60Hz	<b>[100708016]</b> Visor for VEGA S			
Luminaire body options	Mounting accessories			
<b>[DPC]</b> Double powder coating	<b>[160405040]</b> Spike			