


LF8020.693-EN-S-700-830



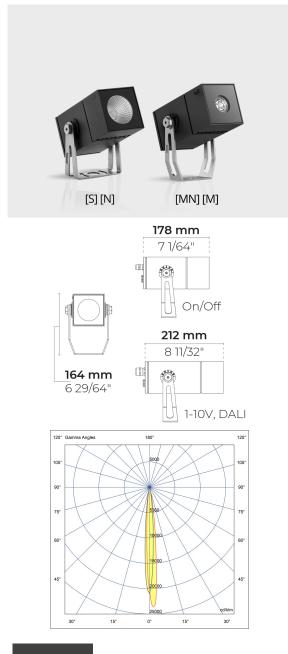

Configuration

Light distribution	[S] 7°
Delivered lumens flux	849 lm
Rated input power	10 W
Color temperature	3000 K CRI 80
Luminaire efficacy	84 lm/W
Lamp	1 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

Options

Technical information

Mounting	Yoke mount (standard), stake mount (optional)
Tilt angle	+60°/-30°
0	
Housing	Corrosion resistant, die-cast, marine grade
Finishin a	aluminum housing
Finishing	Chromate conversion pretreatment followed by
-	electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N],
	PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.07 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	1/1 kV
protection	
Power factor	> 0.91
Through wiring	Single power cord entry
Operating	-2550°C
temperature	
Power cord	20" of outdoor use rated flexible power cord

Accessories (To be ordered separately)

Optical accessories	Mounting accessories	
Visor for VEGA S	Spike	
100708016	160405040	

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com

Project na	me				Туре	Quantity	
Date			Note				
LF8020.	693-EN-S	-700-830-		·			

Light distribution	Rated input power	Color temperature	Control	Product colors
[S] Spot - NEMA Type 0 - 7°	[700] 10 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black
[N] Narrow - NEMA Type 2 - 26° [MN] Medium narrow - NEMA Type 3 - 42° [M] Medium - NEMA Type 4 - 60°		[827] 2700 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[DALI] DALI	[HM2] Dark gray[HM3] Anthracite gray[HM4] Light gray[HM5] White[HM6] Bronze[CC] Custom color (Please specify RAL code)
Extras	Accessories (<i>To be</i> ordered separately)			
Consult the factory	Optical accessories	_		
[UNI] 120-277V 50/60Hz	[100708016] Visor for VEGA S	_		
Luminaire body options	Mounting accessories			
[DPC] Double powder coating	[160405040] Spike			