
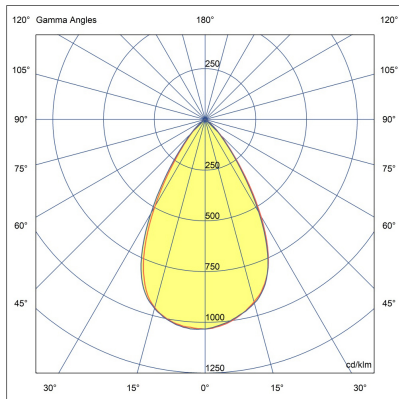
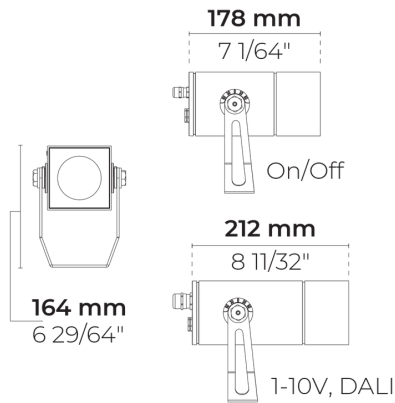


LF8020.693-US-M-700-827-UNI-C1

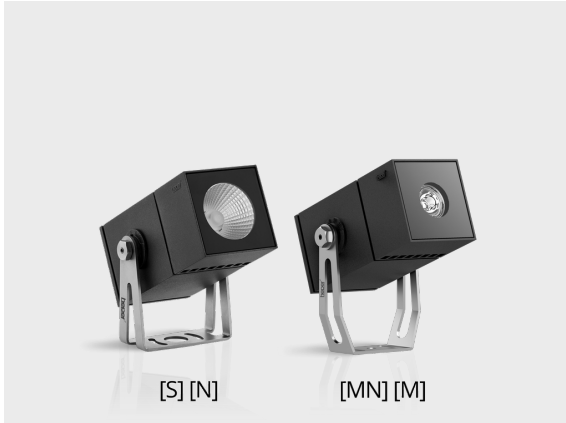

[M]
Medium

Variant

| | |
|------------------------|---------------|
| Light distribution | [M] 60° |
| Delivered lumens flux | 606 lm |
| Rated input power | 10 W |
| Colour temperature | 2700 K CRI 80 |
| Luminaire efficacy | 60 lm/W |
| Lamp | 1 LED |
| MacAdam Ellipse | 5 SDCM |
| Lifetime L90B50 (hour) | >72,600 |
| Lifetime L80B50 (hour) | >72,600 |


Options

Technical information

| | |
|-------------------------|---|
| Mounting | Surface mountable via a bracket (standard) or spike (optional) |
| Tilt angle | +60°/-30° |
| Housing | Corrosion resistant, die-cast, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Liquid silicone |
| Lens / Reflector | High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M] |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK07 |
| Ingress protection | IP65 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 4.5 lbs |
| LED module | Multi-chip high power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 1/1 kV |
| Power factor | > 0.90 |
| Through wiring | Single cable entry |
| Operating temperature | -30...50°C |
| Cable | 0.5 m of flexible cable |

Accessories (To be ordered separately)


Optical accessories



Visor for VEGA S

100708016








Mounting accessories



Spike

160405040

| | | | | | |
|---|--|------|--|----------|--|
| Project name | | Type | | Quantity | |
| Date | | Note | | | |
| LF8020.693-US-M-700-827-__-UNI-C1-__-__ | | | | | |

| Light distribution | Rated input power | Colour temperature | Control | Product colours | |
|---------------------------------------|--|-------------------------------|--------------------------|--|---|
| [M] Medium - 60° | [700] 10 W | [827] 2700 K CRI 80 | [ONOFF] On/Off | [HM1] Black |  |
| [S] Spot - 7° | | [830] 3000 K CRI 80 | [0-10V] 0-10V | [HM2] Dark grey |  |
| [N] Narrow - 26° | | [740] 4000 K CRI 70 | | [HM3] Anthracite grey |  |
| [MN] Medium narrow - 42° | | [840] 4000 K CRI 80 | | [HM4] Light grey |  |
| | | | | [HM5] White |  |
| | | | | [HM6] Bronze |  |
| | | | | [CC] Custom colour (Please specify RAL code) |  |
| Extras | Accessories (<i>To be ordered separately</i>) | | | | |
| Luminaire body options | Optical accessories | | | | |
| [DPC] Double powder coating | [100708016] Visor for VEGA S | | | | |
| | Mounting accessories | | | | |
| | [160405040] Spike | | | | |