
IK07 IP65 🗍



LF8020.693-US-S-700-830-UNI-C1



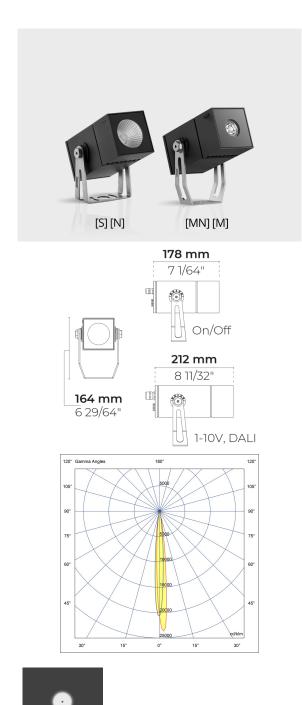

[Spot

Variant

Light distribution	[S] 7°
Delivered lumens flux	849 lm
Rated input power	10 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	84 lm/W
Lamp	1 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

Options

Cable

Technical information

Mounting	Surface mountable via a bracket (standard) or
	spike (optional)
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade
	aluminum housing
Finishing	Chromate conversion pretreatment followed by
	electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N],
	PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	4.5 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	1/1 kV
protection	
Power factor	> 0.90
Through wiring	Single cable entry
Operating	-3050°C
temperature	

0.5 m of flexible cable

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 17.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Optical accessories	Mounting accessories
Visor for VEGA S	Spike
100708016	160405040

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 17.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project na	me				Туре	Quantity	
Date			Note				
LF8020.	593-US-S-	700-830-	UNI-C	1			

700] 10 W	[830] 3000 K CRI 80 [827] 2700 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [0-10V] 0-10V	[HM1] Black[HM2] Dark grey[HM3] Anthracite grey[HM4] Light grey[HM5] White[HM6] Bronze
	2700 K CRI 80 [740] 4000 K CRI 70 [840]		Dark grey [HM3] Anthracite grey [HM4] Light grey [HM5] White [HM6]
	4000 K CRI 70 [840]		Anthracite grey [HM4] Light grey [HM5] White [HM6]
			Light grey [HM5] White [HM6]
			White [HM6]
		1	DIOLIZE
			[CC] (Custom colour (Pleas specify RAL code)
Accessories (<i>To be</i> ordered separately)			
Optical accessories	_		
[100708016] /isor for VEGA S			
Mounting accessories			
1 60405040] Spike			
0 1 1 1 1 1 1	dered separately) ptical accessories 00708016] sor for VEGA S ounting ccessories 60405040]	adered separately) ptical accessories 00708016] sor for VEGA S ounting accessories 60405040]	adered separately) ptical accessories 00708016] sor for VEGA S ounting accessories 60405040]

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 17.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.