

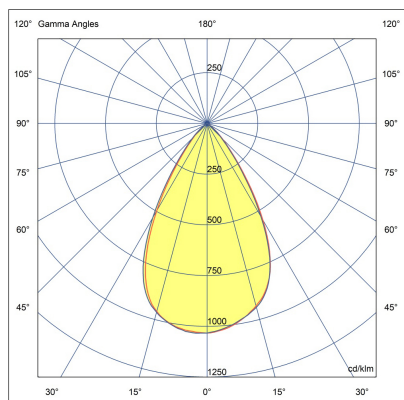


# VEGA S W Duo

CE UK CA IK07 IP65

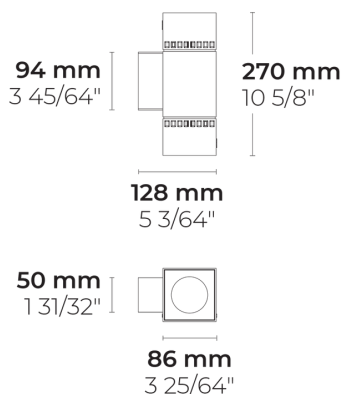

LW7037.519-EN-M-M-700-827-EN-C1

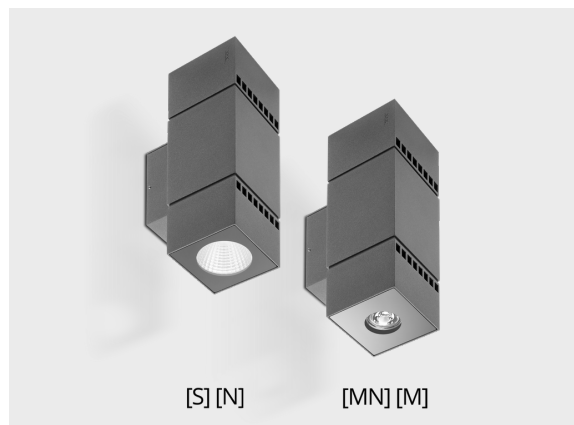

[M-M]

Medium (Up & Down)

## Variant

Light distribution	[M-M] 60°
Delivered lumens flux	1204 lm
Rated input power	18 W
Colour temperature	2700 K CRI 80
Luminaire efficacy	60 lm/W
Lamp	2 LED
MacAdam Ellipse	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

## Options

## Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffuser	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.56 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.2 m of flexible cable
Notes	Please consult factory for combinations of different light distributions.

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com


HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

---








### Optical accessories



#### Visor for VEGA S

100708016

Project name		Type		Quantity	
Date		Note			
LW7037.519-EN-M-M-700-827-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[M-M]</b> Medium (Up & Down) - 60°  <b>[S-S]</b> Spot (Up & Down) - 7°  <b>[N-N]</b> Narrow (Up & Down) - 26°  <b>[MN-MN]</b> Medium Narrow (Up & Down) - 42°	<b>[700]</b> 18 W	<b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[740]</b> 4000 K CRI 70  <b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off  <b>[DALI]</b> DALI	<b>[HM1]</b>  Black  <b>[HM2]</b>  Dark grey  <b>[HM3]</b>  Anthracite grey  <b>[HM4]</b>  Light grey  <b>[HM5]</b>  White  <b>[HM6]</b>  Bronze  <b>[CC]</b>  Custom colour (Please specify RAL code)
Extras	Accessories ( <i>To be ordered separately</i> )			
Consult the factory	Optical accessories			
<b>[UNI]</b> 120-277V 50/60Hz	<b>[100708016]</b> Visor for VEGA S			
Luminaire body options				
<b>[DPC]</b> Double powder coating				