
VEGA S W Duo

LW7037.519-EN-N-700-740



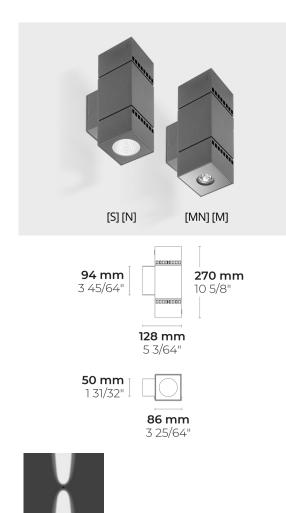

[N-N] Narrow - NEMA Type 2 (Up & Down)

Configuration

Light distribution	[N-N] 26°
Delivered lumens flux	2038 lm
Rated input power	18 W
Color temperature	4000 K CRI 70
Luminaire efficacy	101 lm/W
Lamp	2 LED
Color Deviation	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

Options

Notes

Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum
	housing
Finishing	Chromate conversion pretreatment followed by
	electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N],
	PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.56 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	2/2 kV
protection	
Power factor	> 0.90
Through wiring	Single power cord entry
Operating	-4050°C
temperature	
Power cord	8" of flexible power cord

8" of flexible power cord Please consult factory for combinations of different beam spreads.

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 19.05.2024. For current version visit heperlighting.com. All flux (\pm %7 tolerance) and power values (\pm %10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Optical accessories



Visor for VEGA S 100708016

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 19.05.2024. For current version visit heperlighting.com. All flux (\pm %7 tolerance) and power values (\pm %10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project na	me			Туре	Quantity	
Date			Note			
LW7037	.519-EN-N	N-N-700-7	740			

Rated input power	Color temperature	Control	Product colors
[700] 18 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black
	[827] 2700 K CRI 80	[DALI] DALI	[HM2] Dark gray
	[830] 3000 K CRI 80		[HM3] Anthracite gray
	[840] 4000 K CRI 80		[HM4] Light gray
			[HM5] White
			[HM6] Bronze
			[CC] Custom color (Plea specify RAL code)
Accessories (To be ordered separately)	_		
Optical accessories	_		
[100708016] Visor for VEGA S			
	[700] 18 W Accessories (<i>To be</i> <i>ordered separately</i>) Optical accessories [100708016]	[700] [740] 18 W 4000 K CRI 70 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80 [840] 4000 K CRI 80 [840] 4000 K CRI 80 Some sequences 1000 K CRI 80 [100708016] 1000 K CRI 80	[700] 18 W [740] 4000 K CRI 70 [ONOFF] On/Off [827] 2700 K CRI 80 [DALI] DALI DALI [830] 3000 K CRI 80 [840] 4000 K CRI 80 DALI [840] 4000 K CRI 80 [90] (100 K CRI 80 [90] (100 K CRI 80 Accessories (To be ordered separately) [90] (100708016] [90]