

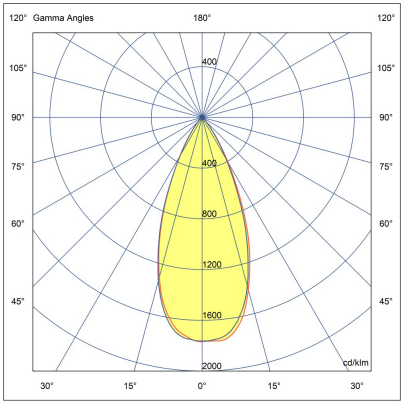


VEGA S W Duo

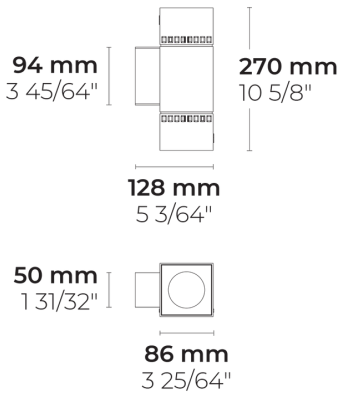

LW7037.519-EN-MN-MN-700-840

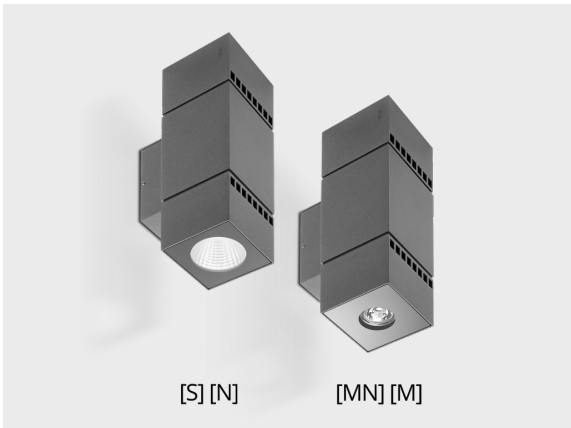

[MN-MN]

Medium Narrow (Up
& Down)

Configuration

Light distribution	[MN-MN] 42°
Delivered lumens flux	1534 lm
Rated input power	18 W
Color temperature	4000 K CRI 80
Luminaire efficacy	76 lm/W
Lamp	2 LED
Color Deviation	5 SDCM
BUG rating	B1-U0-G0
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600


Options

Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffuser	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.56 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	8" of flexible power cord
Notes	Please consult factory for combinations of different beam spreads.

Accessories (To be ordered separately)

Optical accessories



Visor for VEGA S

100708016

Project name				Type		Quantity	
Date		Note					

LW7037.519-EN-MN-MN-700-840-__-__-__-__

Light distribution	Rated input power	Color temperature	Control	Product colors
[MN-MN] Medium Narrow (Up & Down) - 42°	[700] 18 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[HM1]  Black
[S-S] Spot - NEMA Type 0 (Up & Down) - 7°		[827] 2700 K CRI 80	[DALI] DALI	[HM2]  Dark gray
[N-N] Narrow - NEMA Type 2 (Up & Down) - 26°		[830] 3000 K CRI 80		[HM3]  Anthracite gray
[M-M] Medium (Up & Down) - 60°		[740] 4000 K CRI 70		[HM4]  Light gray
				[HM5]  White
				[HM6]  Bronze
				[CC]  Custom color (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Optical accessories			
[UNI] 120-277V 50/60Hz	[100708016] Visor for VEGA S			
Luminaire body options				
[DPC] Double powder coating				