
VEGA S W Duo

СЕ 🕌 ІКО7 ІР65 (=



LW7037.519-EN-S-S-700-840-EN-C1

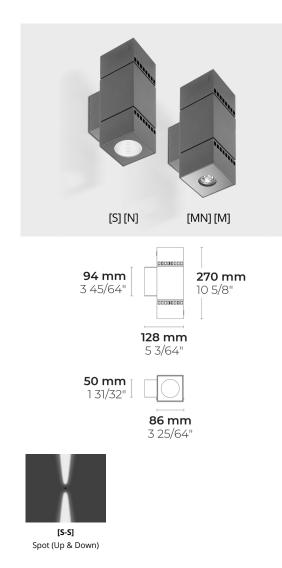

Variant

Light distribution Delivered lumens flux	[S-S] 7° 1906 lm
Rated input power	18 W
Colour temperature	4000 K CRI 80
Luminaire efficacy	105 lm/W
Lamp	2 LED
MacAdam Ellipse	5 SDCM
BUG rating	B1-U1-G0
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

Options

Notes

Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum
U	housing
Finishing	Chromate conversion pretreatment followed by
0	electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N],
	PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.56 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	2/2 kV
protection	
Power factor	> 0.90
Through wiring	Single cable entry
Operating	-4050°C
temperature	
Cable	0.2 m of flexible cable
Cubic	

Please consult factory for combinations of different light distributions.

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 19.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Optical accessories



Visor for VEGA S 100708016

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 19.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project na	me				Туре	Quantity	
Date			Note				
LW7037	.519-EN-S	5-S-700-84	40EN	·C1			

Light distribution	Rated input power	Colour temperature	Control	Product colours
[S-S] Spot (Up & Down) - 7°	[700] 18 W	[840] 4000 K CRI 80	[ONOFF] On/Off	[HM1] Black
[N-N] Narrow (Up & Down) - 26°		[827] 2700 K CRI 80	[DALI] DALI	[HM2] Dark grey
[MN-MN] Medium Narrow (Up		[830] 3000 K CRI 80		[HM3] Anthracite grey
& Down) - 42° [M-M]		[740] 4000 K CRI 70		[HM4] Light grey
Medium (Up & Down) - 60°				[HM5] White
				[HM6] Bronze
				[CC] Custom colour (Plea specify RAL code)
Extras	Accessories (<i>To be</i> ordered separately)			
Consult the factory	Optical accessories	_		
[UNI] 120-277V 50/60Hz	[100708016] Visor for VEGA S			
Luminaire body options				
[DPC] Double powder coating				

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 19.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

3/3